




Catalog 2019

1984 Bekamak was founded as a family Company


22.500 m² production area

150 employees 20% of them are Engineers and Technicians

86 kinds of sawing machines

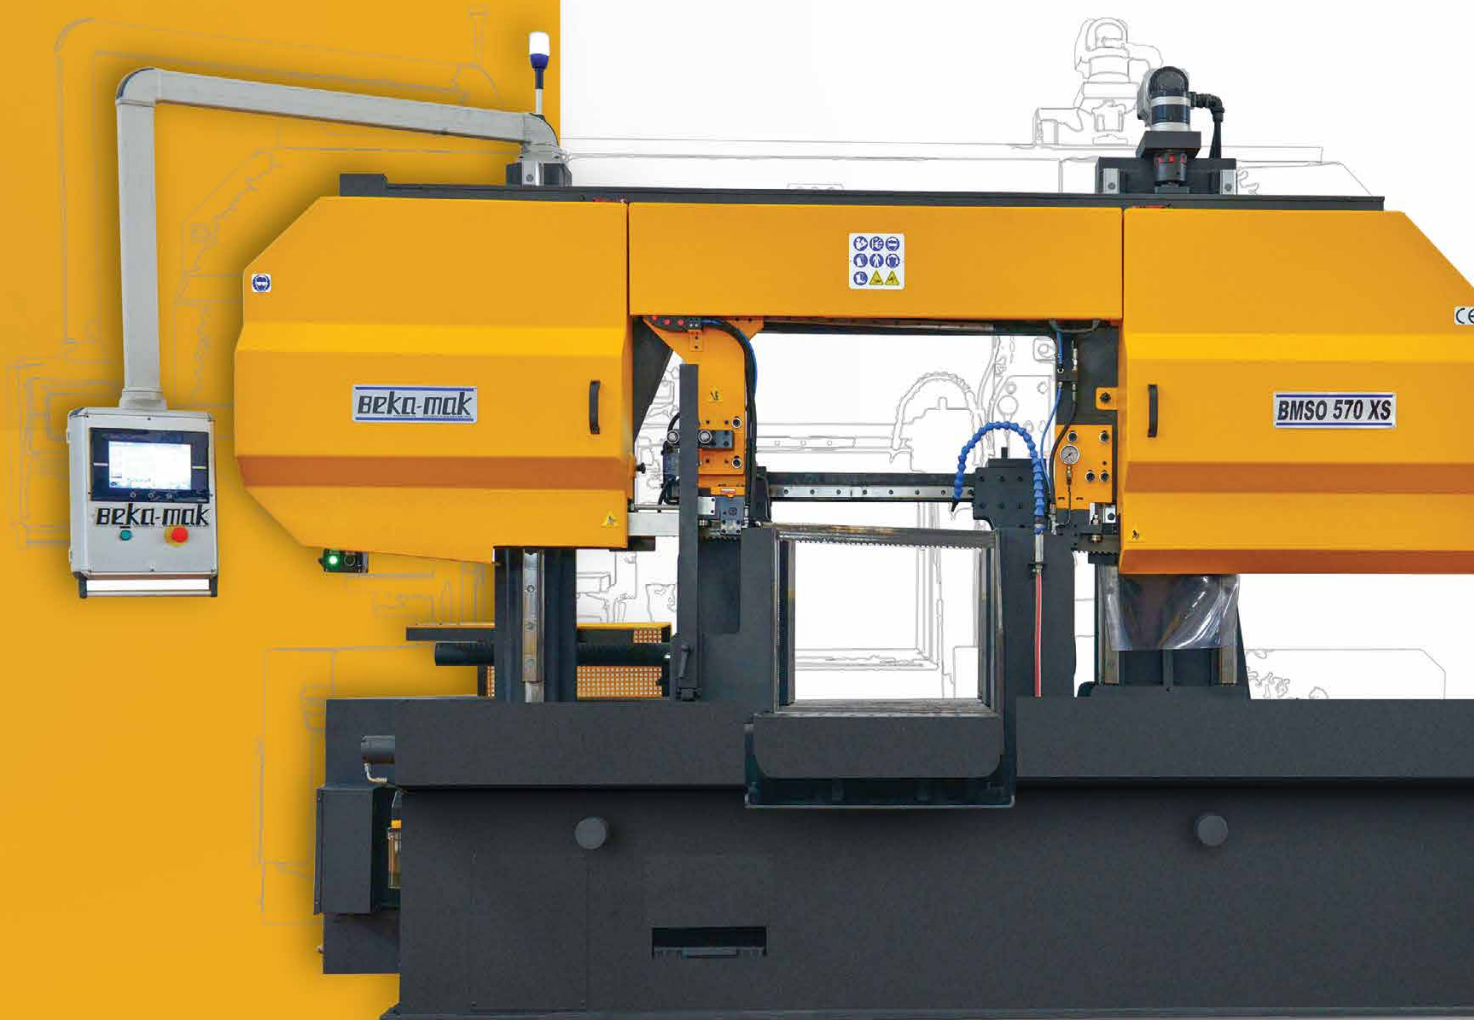

Everything starts by cutting





Founded as a family company in 1984, BEKA-MAK is the pioneering company, opening up the sawing machines sector in Turkey to global market. Beginning its first export to Germany in 1991, BEKA-MAK is now represented in nearly 80 countries by 60 distributors around the world, mainly in Europe, Russia and the United States. Our circular saw and bandsawing machines, which operate with high efficiency in a wide range of products, are also the preference of Turkey's leading steel producers.

BEKA-MAK, operating in 10.500m² establishment with its 150 qualified employees, continues to contribute to the steel industry with its philosophy of continues development and innovation. We are proud to announce that our official Research and Development Department



Circular Saw Machines

BMDO ISAW - 100 IA	08
BMDO ISAW - 120 IA	08
BMDO ISAW - 150 IA	08
BMDO ISAW - 80 VA	10

Fully Automatic Double Column
Bandsaw Machines with
Servo/Hydraulic Feeding System

BMSO 570 XS	14
BMSO 650 CS/CH NC	16
BMSO 560 CS/CH NC	17
BMSO 460 CS/CH NC	18
BMSO 360 CS/CH NC	19
BMSO 330 CS/CH NC	20
P-SAW 330 CS	22

Fully Automatic One Side Mitre
Cutting Machines with
Hydraulic/Servo Feeding System

BMSO 540 CGH/CGS NC	26
BMSO 440 CGH/CGS NC	28
BMSO 360 CGH/CGS NC	29
BMSO 325 CGH/CGS NC	29
BMSO 320 GHL NC/GSL NC	30
BMSO 320 GH NC/GS NC	31
BMSO 320 H NC/S NC	32
BMSO 320 LH NC/LS NC	33

Double Column Semi Automatic
Double Mitre Bandsaw Machines

BMSY 650 DG NC	36
BMSY 750 DG NC	37
BMSY 560 DG	38
BMSY 560 DG NC	38
BMSY 440 CDGH	39
BMSY 440 CDGH NC	39
BMSY 360 CDGH	40

Heavy Duty Semi Automatic
Double Column Bandsaw Machines

BMSY 1515C	44
BMSY 1122C	46
BMSY 1313C	48
BMSY 1113C	50
BMSY 1110C	51

Semi Automatic Double Column
Bandsaw Machines

BMSY 1020C	54
BMSY 820C	56
BMSY 810C	58
BMSY 650C	60
BMSY 570C	61
BMSY 560C	61
BMSY 460C	62
BMSY 360C	64
BMSY 325C	65

Fully Automatic Double Column
Bandsaw Machines

BMSO 820C	68
BMSO 810C	70
BMSO 560C	72
BMSO 460C	73
BMSO 360C	74
BMSO 325C	75



Semi Automatic Mitre Cutting Bandsaw Machines

BMSY 810 CGH	78
BMSY 540 CGH	80
BMSY 440 CGH	82
BMSY 360 CGH	83
BMSY 325 CGH	84
BMSY 320 GL	85
BMSY 320 G	86
BMS 320 G	87



Semi Automatic Double Mitre Cutting Pivot Type Bandsaw Machines

BMSY 440 DGH / DGH NC	90
BMSY 360 DGH	92
BMSY 360 DGH ECO	93
BMSY 270 DGH	94
BMSY 270 DG	94
BMS 270 DG	95
BMSY 230 DGH	96
BMSY 230 DG	96
BMS 230 DG	97



Fully Automatic Pivot Type Bandsaw Machines

BMSO 440	100
BMSO 320 L	101
BMSO 320	102
BMSO 230	103



Semi Automatic Pivot Type Bandsaw Machines

BMSY 440	106
BMSY 350 M	108
BMSY 320 L	109
BMSY 320	110
BMSY 280	111



Manual Pivot Type Bandsaw Machines

BMS 320	114
BMS 280	115



Hydraulic Hacksawing Machine

BMH 170	117
---------	-----



CIRCULAR SAW MACHINES

BMDO ISAW - 100 IA
BMDO ISAW - 120 IA
BMDO ISAW - 150 IA
BMDO ISAW - 80 VA



Type	Page
BMDO ISAW 100 IA	08
BMDO ISAW 120 IA	08
BMDO ISAW 150 IA	08
BMDO ISAW 80 VA	10

BMDO ISAW - 100 IA

BMDO ISAW - 120 IA

BMDO ISAW - 150 VA


Fully Automatic Circular Saw Machine

BMDO 100 IA- Mass production in continuous operation is done by BMDO 100 IA when producing cut-off pieces of steel and non-ferrous metals with a material cross-section up to a diameter of 100 mm. BMDO 100 IA is designed to be used with TCT circular saw blade in order to cut solid bars in high speed and excellent precise. It is also suitable for HSS blades to cut tubes. With the Standard 800mm stroke servo feeding and 6 meters automatic loader, BMDO 100 IA is perfect for large-scale production.




Technical Datas

	BMDO ISAW - 100 IA		BMDO ISAW - 120 IA		BMDO ISAW - 150 IA	
						
Cutting Capacity	0°	20 - 100	0°	20 - 120	0°	20 - 150
Servo Feeding Stroke	800 mm		800 mm		800 mm	
Shortest length of residual piece	60		60		60	
Loader Length	6 m		6 m		6 m	
Loader Weight	115 Kg		115 Kg		150 Kg	
Main Motor	11 kW		15 kW		15 kW	
Hydraulic Motor	2,2 kW		4 kW		4 kW	
Coolant Motor	0,2 kW		0,2 kW		0,2 kW	
Feeder Servo Motor	2 kW		2 kW		2 kW	
Bow Servo Motor	2 kW		5 kW		5 kW	
Chip Conveyor Motor	0,25 kW		0,25 kW		0,25 kW	
Cutting Speeds	40 - 200 m/min		40 - 280 m/min		40-280 m/min	
Blade Sizes	Ø 360x2,6 mm		Ø 420 x 2,7 mm		Ø 460 x 2,7 mm	
Working Height	800 mm		800 mm		800 mm	
Dimensions	Length 2460 mm		Length 2460 mm		Length 2460 mm	
	Width 2360mm		Width 2450 mm		Width 2450 mm	
	Height 2610 mm		Height 2610 mm		Height 2610 mm	
	Weight 3450 Kg		Weight 3500 Kg		Weight 4000 Kg	




Superior Gearbox Design for maximum performance

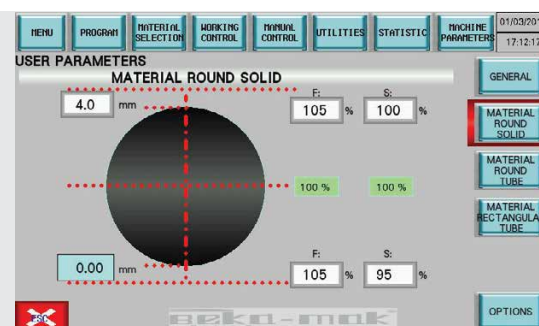

BMDO ISAW - 80 VA


Fully Automatic Circular Saw Machine

BMDO 80 VA- With the vertical bow movement, BMDO 80 VA is specially designed for tube cutting in significant speeds with perfect precise. The fully automatic machine with 500mm stroke servo feeding is optimized for HSS circular saw blade in order to cut tubes with no chip but excellent surface. 6 meters automatic loader is optional for customers who needs mass tube production.



Technical Datas

			Vice Opening	Feeding Stroke
Cutting Capacity	0°	20 - 80	85 (max)	500 - 3000 max (One Stroke 500mm Multi Stroke 3000 mm)
Main Motor	5,5 kW			
Hydraulic Motor	1,5 kW			
Coolant Motor	0,2 kW			
Feeding Servo Motor	1 kW			
Bow Servo Motor	2 kW			
Chip Conveyor Motor	0,25 kW			
Cutting Speeds	20 - 150 m/min			
Blade Sizes HSS	Ø 280 ~ Ø350/2.0t ~ 3.0t (max) m/min			
Working Height	900 mm			
Dimensions	Lenght 1600 mm	Width 1700 mm	Height 2100 mm	Weight 1425 kg



FULLY AUTOMATIC DOUBLE COLUMN BANDSAW MACHINES WITH SERVO/HYDRAULIC FEEDING SYSTEM

BMSO 570 XS - BMSO 650 CH/CS - BMSO 560 CH/CS
BMSO 460 CH/CS - BMSO 360 CH/CS NC
BMSO 330 CS/CH NC - P-SAW 330 CS

XS Series


XS = We are proud to announce the XS series to the market in the steel industry where the cutting speed and blade life have become more and more important every day. The fully automatic machine is optimized for carbide and bimetallic blades and can be applied in areas such as the steel trade, steel production, forging mills, machine manufacturing and the automotive industry. We have added CNC SMART cutting feature with ball screw spindle which is driven by servo motor, while the machine has zero cutting tolerances with servo feeding system. XS with smart cutting system makes the most efficient cutting by determining the optimal cutting parameters according to the type and size of the material in order to match the type of blade being used. These optimal cutting parameters reduce the tool costs and leave the best surface.

CS Series

CS = CS series are the ideal machines for mass production and bundle cutting of solid material, tube and profile. Servo feeding system with ball screw reduces cutting tolerances to zero error margin. PLC controlled user friendly colour touch screen allows to save 100 different cutting programs with 50 cutting steps. Hydraulic top clamping and hexagonal vice options are also available for bundle cutting.

CH Series

CH = CH series are the ideal machines for mass production and bundle cutting of solid material, tube and profile. It allows programming of 10 different cutting steps with PLC control panel.

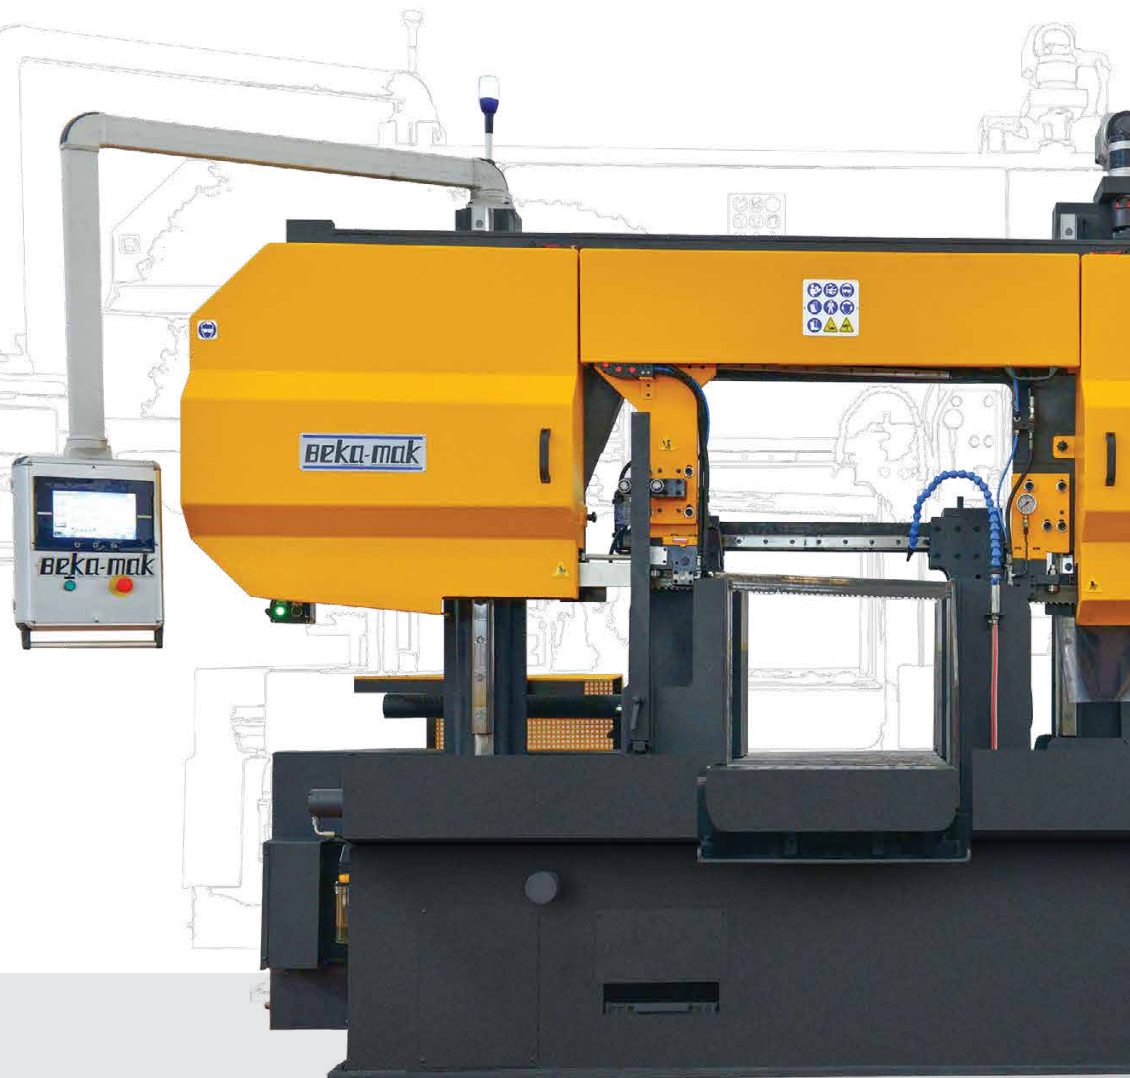

Type	Page
BMSO 570 XS	14
BMSO 650 CS/CH	16
BMSO 560 CS/CH	17
BMSO 460 CS/CH NC	18
BMSO 360 CS/CH NC	19
BMSO 330 CS/CH NC	20
P-SAW 330 CS	22

BMSO 570 XS



The High Efficient Bandsaw Machine

Standards

- Smart cut and user friendly touch screen with Omron CNC cutting program.
- Ability to save up to 50 different cutting length steps in 100 different programs.
- Cutting parameters are CNC controlled for an optimal processing of workpiece.
- Manual cutting parameters input.
- Servo feeding with 700mm stroke.
- Guide arm travels on linear guide way and moves in coordination with the moveable vise jaw.
- Hydraulic actuated carbide blade guides.
- Idle Wheel motion detector and automatic deflection sensor.
- Vibration free cutting with 3 linear way.
- Motorized swarf brush.
- Planetary Gearbox.

Optionals

- Hydraulic Top Clamping
- Microspray Coolant
- 15 KW Main Motor
- Hexagonal Vices

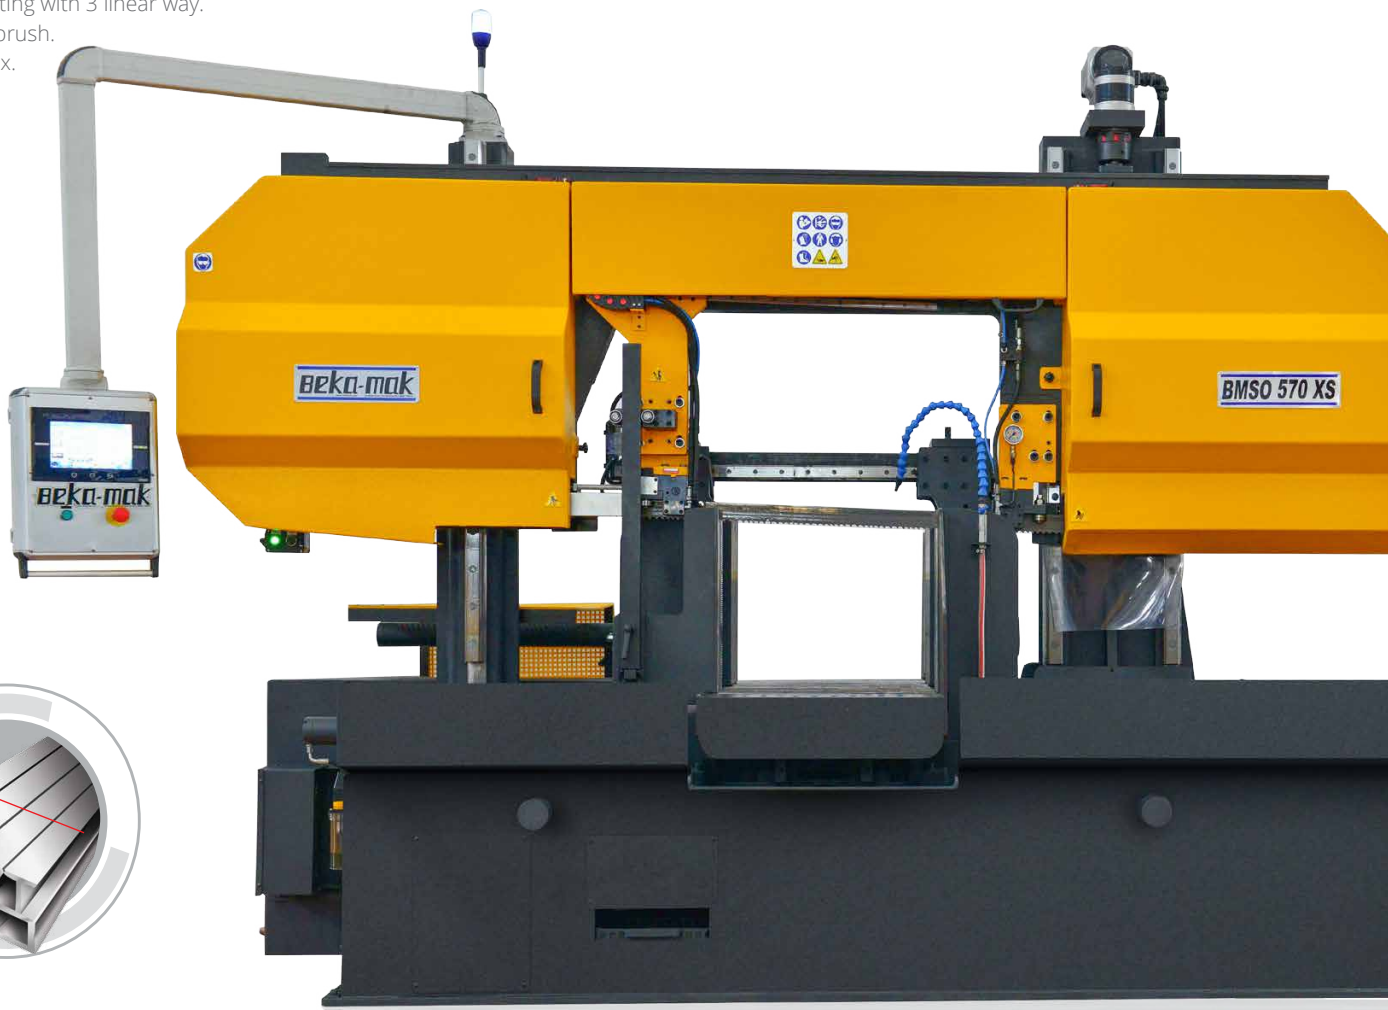

Hexagonal Vices



Hydraulic Top Clamping



Microspray Coolant



15 KW Main Motor



Technical Datas

				
Cutting Capacity	0°	570	600 x 570	570
Main Motor	7,5 kW			
Hydraulic Motor	2,2 kW			
Coolant Motor	0,2 kW			
Chip Conveyor	0,37 kW			
Bow Servo Motor	1,5 kW			
Feeding Servo Motor	2 kW			
Chip Brush Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Cutting Speeds	(15 kW Motor) 20 - 150 m/min			
Feeding Stroke	700 mm			
Optional Feeding Stroke	1000 mm			
Multiple Stroke	9999 mm			
Blade Size	7400 x 54 x 1,6 mm			
Working Height	805 mm			
Dimensions	Lenght 3500 mm	Width 2000 mm	Height 2700 mm	Weight 5900 kg

1 User friendly and flexible easy to use interface with next generation PLC and HMI infrastructure compatible with Industry 4.0. The ability to save up to 50 different programs, which cuts orders for up to 100 different lengths. Moreover when you select the type of material it calculates the cutting speed accordingly.

2 Automatic Hydraulic Blade Tension

3 Due to servo cutting and 3 way linear bow, it makes smart cutting with no vibration

4 Deflection Sensor

5 Servo Feeding System

1



2



3



4



5



STANDARD

BMSO 650 CS/CH NC - BMSO 560 CS/CH NC

CH Fully Automatic Bandsaw Machine with Hydraulic System

CS Fully Automatic Bandsaw Machine with Servo System

Standards (BMSO 650 CS/CH NC)


Friendly Use PLC Control Panel
Motorized Chip Brush
Linear Way
Planetary Gearbox
Inverter
Sensitive Pressure
Idle Wheel Motion Detector For Blade Stalling
Hydraulic Split Vice
Chip Conveyor
Hydraulic Blade Tension (650 CH/CS)

Standards (BMSO 560 CS/CH NC)

Hydraumechanical Blade Tension
Inverter
Synchronization Moveable Arm/Vice
Linear Way
Hydraulic Vice
PLC Control Panel
Hydraulic Feeding Vice
Offered Hydraulic Rear Vice
Planetary Gearbox
Security Switch
Sensitive Pressure
SAP Coolant Pump
Chip Brush
Optical Quick Approaching
Blade 41
Security Switch In Case of Blade Stuck
Hydraulic split vice

Optionals

Hydraulic Blade Tension
Hexagonal Vices
Microspray Coolant
3 Mt Roller Table
Hydraulic Top Clamping
15 kW Main Motor (BMSO 650 CS/CH)
Chip Conveyor (BMSO 560 CS/CH)



Motorized Chip Brush



Hydraulic Blade Tension



Hexagonal Vices



Microspray Coolant



3 Mt Roller Table




Hydraulic Top Clamping



Technical Datas

	BMSO 650 CS/CH NC				BMSO 560 CS/CH NC			
								
Cutting Capacity	0°	650	1050 x 600	600	0°	560	600 x 560	560
Main Motor	7,5 kW				4 kW			
Hydraulic Motor	4 kW				2,2 kW			
Coolant Motor	0,12 kW				0,12 kW			
Feeding Servo Motor (CS)	2 kW				2 kW			
Cutting Speeds	20 - 120 m/min				20 - 100 m/min			
Feeding Stroke	700 mm (CS) - 500 mm (CH)				700 mm (CS) - 500 mm (CH)			
Multiple Stroke	9999 mm (CS) - 6000 mm (CH)				9999 mm (CS) - 6000 mm (CH)			
Blade Size	8400 x 54 x 1,6 mm				6000 x 41 x 1,3			
Working Height	825 mm				810 mm			
Dimensions	Length 4250 mm Width 1750 mm		Height 2600 mm Weight 6580 kg		Length 3250 mm Width 2200 mm		Height 2350 mm Weight 4850 kg	



Chip Conveyor



Hydraulic Blade Tension



Hexagonal Vices



Microspray Coolant



3 Mt Roller Table



Hydraulic Top Clamping



BMSO 460 CS/CH NC - BMSO 360 CS/CH NC


CH *Fully Automatic Bandsaw Machine with Hydraulic System*

CS *Fully Automatic Bandsaw Machine with Servo System*



Motorized Chip Brush





Technical Datas

	BMSO 460 CS/CH NC				BMSO 360 CS/CH NC			
								
Cutting Capacity	0°	460	550 x 460	460	0°	360	400 x 360	360
Main Motor	4 kW				3 kW			
Hydraulic Motor	2,2 kW				1,5 kW			
Coolant Motor	0,12 kW				0,12 kW			
Feeding Servo Motor	1 kW				1 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Feeding Stroke	700 mm (CS) - 500 mm (CH)				700 mm (CS) - 500 mm (CH)			
Multiple Stroke	9999 mm (CS) - 6000 mm (CH)				9999 mm (CS) - 6000 mm (CH)			
Optional Feeding Stroke	1000 mm				1000 mm			
Blade Size	5200 x 41 x 1,3 mm				4800 x 34 x 1,1 mm			
Working Height	805 mm				800 mm			
Dimensions	Lenght 3000 mm		Height 2100 mm		Lenght 2850 mm		Height 1890 mm	
	Width 2100 mm		Weight 3250 kg		Width 2000 mm		Weight 2580 kg	

Standards

Friendly Use PLC Control Panel	Chip Conveyor
Hydraumechanical Blade Tension	Synchronization Moveable Arm/Vice
Chip Brush	Security Switch
Linear Way	Sensitive Pressure
Height Adjustment Switch	SAP Coolant Pump
Planetary Gearbox	Blade 41
Inverter	Security Switch In Case of Blade Stuck
Sensitive Pressure	Idle Wheel Motion Detector For Blade Stalling
Hydraulic Split Vice	

Optionals

Hydraulic Blade Tension
Hexagonal Vices
Microspray Coolant
3 Mt Roller Table
Hydraulic Top Clamping
2° Inclined Bow
Motorized Chip Brush

Hydraulic Blade Tension



Hexagonal Vices



Microspray Coolant



3 Mt Roller Table



Hydraulic Top Clamping




2° Inclined Bow




BMSO 330 CS/CH NC

CH *Fully Automatic Bandsaw Machine with Hydraulic System*

CS *Fully Automatic Bandsaw Machine with Servo System*

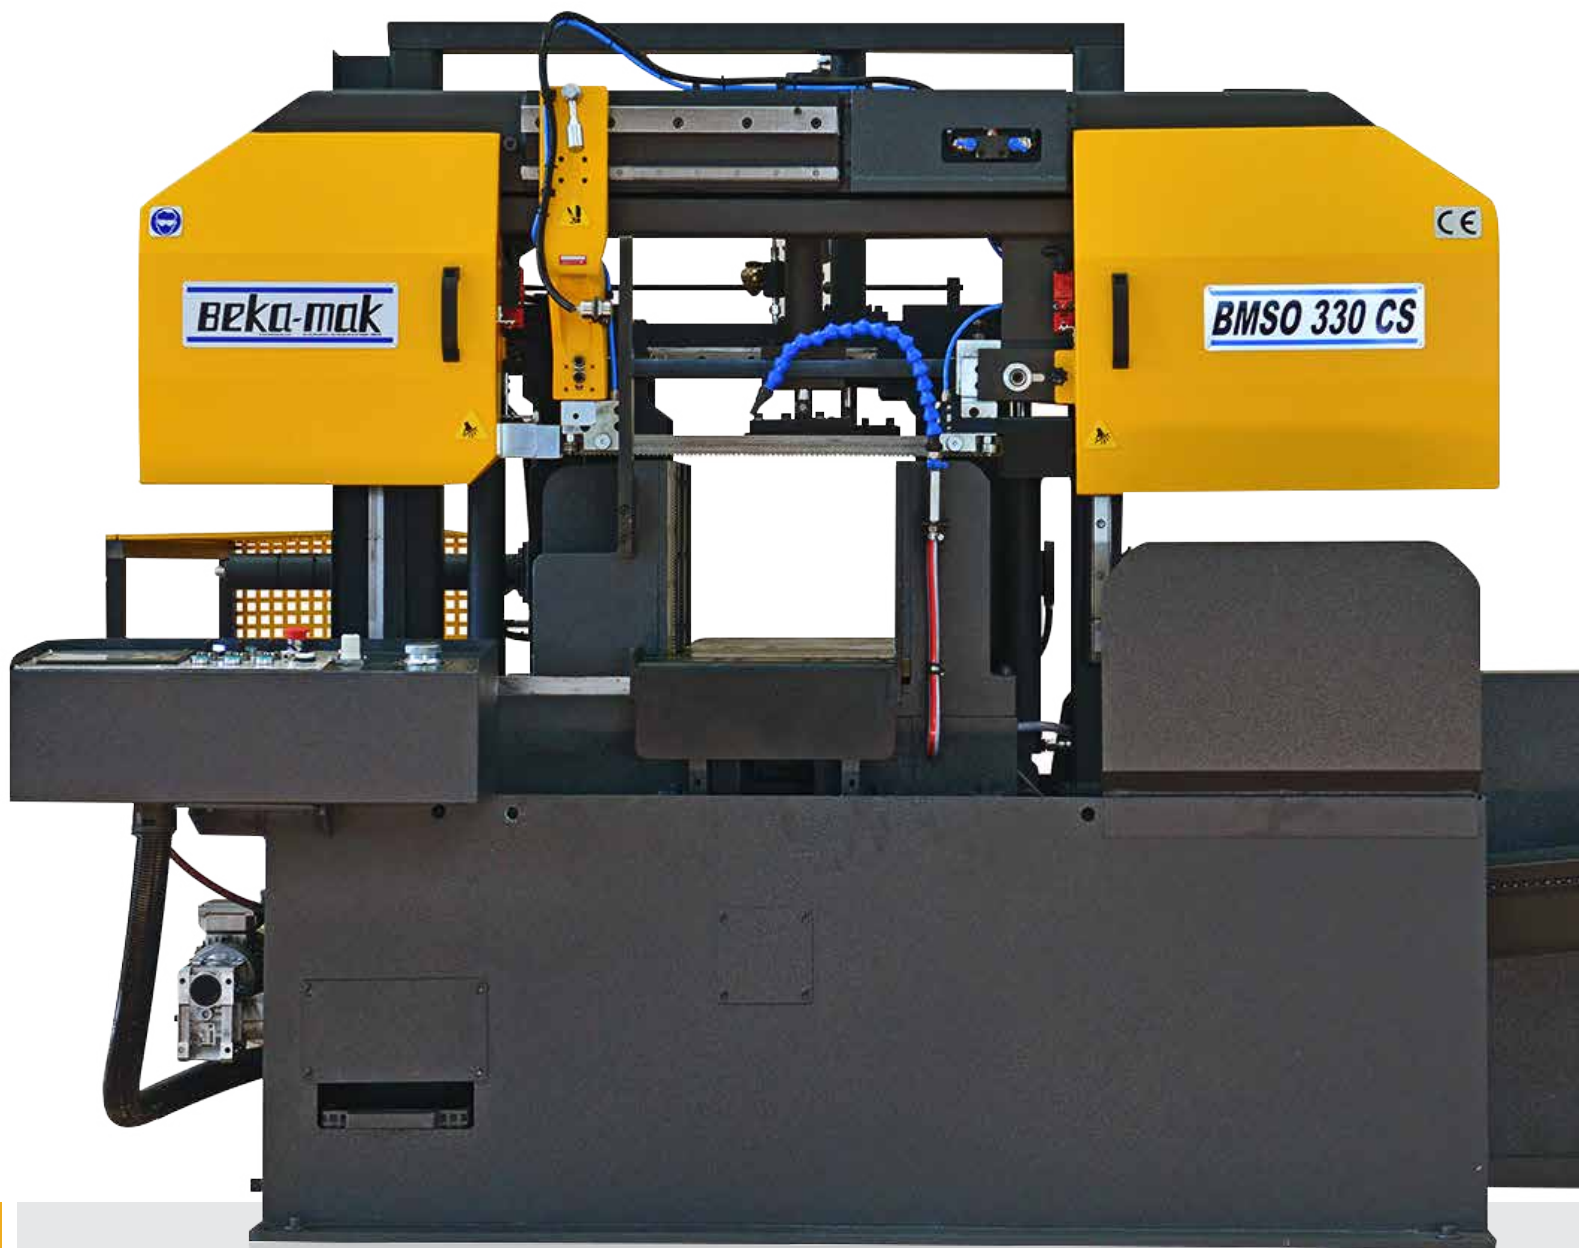



Technical Datas

				
Cutting Capacity	0°	330	360 x 330	330
Main Motor	3 kW			
Hydraulic Motor	1,5 kW			
Coolant Motor	0,12 kW			
Feeding Servo Motor	1 kW			
Cutting Speeds	20 - 100 m/min			
Multiple Stroke	9999 mm			
Blade Size	4380 x 34 x 1,1 mm			
Working Height	850			
Dimensions	Lenght 2100 mm Width 2300 mm Height 1560 mm Weight 2120 kg			

Standards

Friendly Use PLC Control Panel
 Hydraumechanical Blade Tension
 Chip Brush
 Linear Way
 Height Adjustment Swich
 Planetary Gearbox
 Inverter
 Sensitive Pressure
 Idle Wheel Motion Detector For Blade Stalling
 Hydraulic Split Vice
 Chip Conveyor

Optionals

Hydraulic Blade Tension
 Hexagonal Vices
 Microspray Coolant
 3 Mt Roller Table
 Hydraulic Top Clamping
 4 kW Motor



**Motorized Chip
Brush**



**Hydraulic Blade
Tension**



Hexagonal Vices



Microspray Coolant



3 Mt Roller Table



**Hydraulic Top
Clamping**



P-SAW 330 CS

Fully Automatic Bandsaw Machine with Servo System


Standards

Inverter
Sensitive Pressure
Hydraulic Blade Tension
Optical Height Adjustment
Servo Material Feeding Vice
Chip Conveyor

Optionals


Hexagonal Vices
Microspray Coolant
3 Mt Roller Table
Hydraulic Top Clamping





Technical Datas

				
Cutting Capacity	0°	330	360 x 330	330
Main Motor	3 kW			
Hydraulic Motor	1,5 kW			
Coolant Motor	0,12 kW			
Chip Conveyor Motor	0,25 kW			
Cutting Speeds	20 - 100 m/min			
Stroke	700 mm			
Blade Size	4380 x 34 x 1,1 mm			
Working Height	850			
Dimensions	Lenght 2625 mm Width 1900 mm Height 1900 mm Weight 2150 kg			

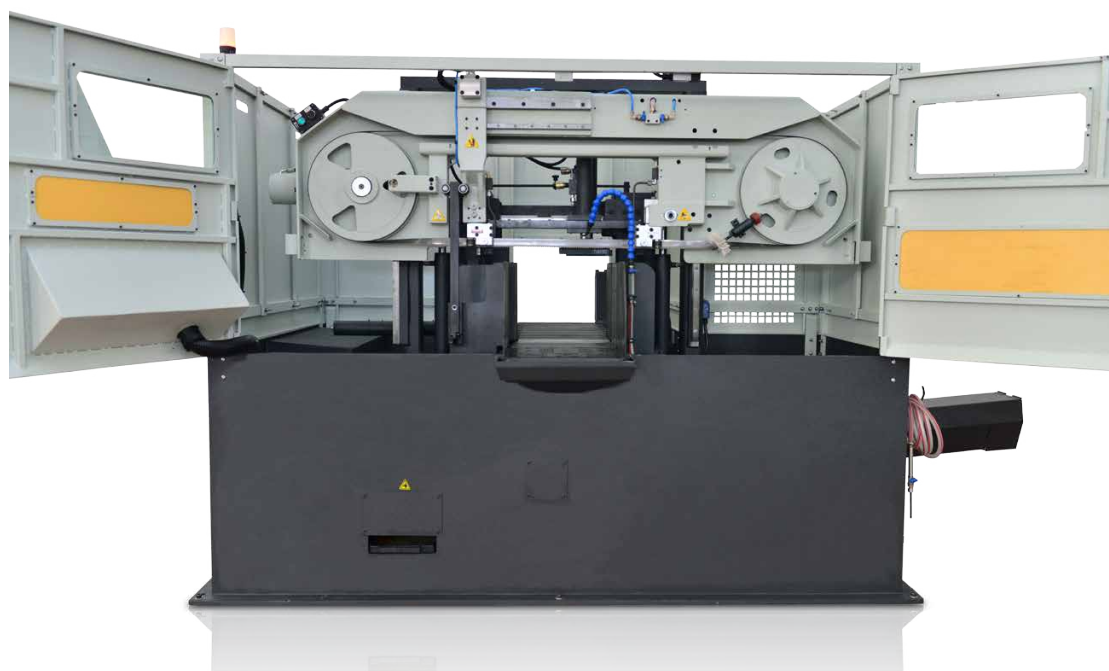

Hydraulic Top Clamping



3 Mt Roller Table



Microspray Coolant



Hexagonal Vices



FULLY AUTOMATIC WITH FEEDING SYSTEM MITRE CUTTING BANDSAWING MACHINES

BMSO 540 CGH/CGS NC - BMSO 440 CGH/CGS NC
BMSO 360 CGH/CGS NC - BMSO 325 CGH/CGS NC
BMSO 320 GHL NC/GSL NC - BMSO 320 GH NC/GS NC
BMSO 320 H NC/S NC - BMSO 320 LH NC/LS NC

500 mm Stroke Hydraulic Feeding (CGH)

700mm Stroke Servo Feeding

One Side Mitre Cutting

PLC Control Panel



Type	Page
BMSO 540 CGH/CGS NC	26
BMSO 440 CGH/CGS NC	28
BMSO 360 CGH/CGS NC	29
BMSO 325 CGH/CGS NC	29
BMSO 320 GHL NC/GSL NC	30
BMSO 320 GH NC/GS NC	31
BMSO 320 H NC/S NC	32
BMSO 320 LH NC/LS NC	33

BMSO 540 CGH/CGS NC

CGH *Fully Automatic Mitre Cutting Bandsaw Machine With Hydraulic Feeding System*

CGS *Fully Automatic Mitre Cutting Bandsaw Machine With Servo Feeding System*

Standards

PLC Control Panel

Linear Way

Hydraumechanical Blade Tension

Synchronization Moveable Arm/Vice

Planetary Gearbox

Inverter

Sensitive Pressure

Hydraulic Angle Fixing

Security Switch

SAP Coolant Pump

Chip Brush

Optical Quick Approaching

3° Inclined Bow

Hydraulic Vice

Idle Wheel Motion Detector

For Blade Stalling

Optionals

Hexagonal Vices

Microspray Coolant

3 Mt Roller Table

Chip Conveyor

Hydraulic Top Clamping

Laser Pointer

Hydraulic Blade Tension



Hexagonal Vices



Microspray Coolant



Technical Datas

				
Cutting Capacity	0°	540	670 x 540	540
	30°	540	670 x 540	540
	45°	510	450 x 540	450
	60°	270	250 x 540	250
Main Motor	4 kW			
Hydraulic Motor	1,1 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Feeding Stroke	500 mm (CGH) - 700 mm (CGS)			
Blade Size	6000 x 41 x 1,3 mm			
Working Height	810 mm			
Dimensions	Lenght 3100 mm	Width 2350 mm	Height 2150 mm	Weight 3850 kg


** Hydraulic top clamping is nonfunctional at bigger than 45 degree.*



3 Mt Roller Table



Chip Conveyor



Hydraulic Top Clamping



Laser Pointer



Hydraulic Blade Tension



BMSO 440 CGH/CGS NC

BMSO 360 CGH/CGS NC

BMSO 325 CGH/CGS NC

CGH *Fully Automatic Mitre Cutting Bandsaw Machine With Hydraulic Feeding System*
CGS *Fully Automatic Mitre Cutting Bandsaw Machine With Servo Feeding System*


Standards

Blade 41
 3° Inclined Bow
 Chip Brush
 PLC Control Panel
 Synchronization Moveable Arm/Vice
 Optical Quick Approaching
 Sensitive Pressure
 Hydraumechanical Blade Tension
 Hydraulic Angle Fixing

SAP Coolant Pump
 Planetary Gearbox
 Hydraulic Vice
 Linear Way
 Security Switch
 Inverter
 Security Switch In Case of Blade Stuck

Optionals

Hydraulic Blade Tension
 Hexagonal Vices
 3 Mt Roller Table
 Hydraulic Top Clamping
 Microspray Coolant
 Chip Conveyor
 Laser Pointer



Hexagonal Vices



Microspray Coolant



3 Mt Roller Table



Chip Conveyor



Hydraulic Top Clamping



Laser Pointer




Hydraulic Blade Tension



Technical Datas

	BMSO 440 CGH/CGS NC				BMSO 360 CGH/CGS NC				BMSO 325 CGH/CGS NC			
												
Cutting Capacity	0°	450	610 x 425	425	0°	360	610 x 360	360	0°	325	400 x 315	315
	30°	450	560 x 425	425	30°	360	590 x 360	360	30°	325	380 x 315	315
	45°	430	430 x 425	425	45°	360	450 x 360	360	45°	300	300 x 315	300
	60°	320	260 x 425	290	60°	325	280 x 360	290	60°	200	200 x 315	200
Main Motor	4 kW				3 kW				2,2 kW			
Hydraulic Motor	2,2 kW				1,5 kW				1,5 kW			
Coolant Pump	0,12 kW				0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min				20 - 100 m/min			
Blade Size	5400 x 41 x 1,3 mm				5200 x 34 x 1,1 mm				4380 x 34 x 1,1mm			
Working Height	735 mm				735 mm				655 mm			
Dimensions	Lenght 2850 mm		Height 1950 mm		Lenght 2850 mm		Height 1820 mm		Lenght 2130 mm		Height 1650mm	
	Width 2100 mm		Weight 2480 kg		Width 2100 mm		Weight 2400 kg		Width 2150 mm		Weight 1860 kg	



BMSO 320 GLH NC/GLS NC

BMSO 320 GH NC/GS NC

GLH *Fully Automatic Mitre Cutting Bandsawing Machine With Hydraulic Feeding System*


GLS *Fully Automatic Mitre Cutting Bandsawing Machine With Servo Feeding System*

Standards

Inverter	Height Adjustment Switch
Chip Brush	Hydraumechanical Blade Tension
Security Switch	SAP Coolant Pump
Hydraulic Shuttle Vice	Digital Angle Display
Planetary Gearbox	
PLC Control Panel	


Optionals

Sensitive Pressure
Hexagonal Vices
Microspray Coolant
Hydraulic Blade Tension
3 Mt Roller Table
Hydraulic Top Clamping



Technical Datas

	BMSO 320 GLH NC/GSL NC				BMSO 320 GH NC/GS NC			
								
Cutting Capacity	0°	320	610 x 320	320	0°	320	350 x 320	320
	-30°	260	280 x 200	225	-30°	160	150 x 150	150
	-45°	320	355 x 320	320	-45°	260	250 x 180	180
	-60°	320	510 x 320	320	-60°	300	300 x 200	250
	-75°	320	580 x 320	320	-75°	320	350 x 200	300
Main Motor	2,2 kW				2,2 kW			
Hydraulic Motor	1,1 kW				1,1 kW			
Coolant Pump	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	4160 x 34 x 1,1 mm				3660 x 27 x 0,9 mm			
Working Height	740 mm				740 mm			
Dimensions	Lenght 2370 mm		Height 1500 mm		Lenght 2100 mm		Height 1500 mm	
	Width 2400 mm		Weight 2060 kg		Width 2200 mm		Weight 1660 kg	



Sensitive Pressure



Microspray Coolant



Chip Conveyor



Hydraulic Blade Tension



3 Mt Roller Table



Hexagonal Vices



Hydraulic Top Clamping



BMSO 320 H NC/S NC

BMSO 320 LH NC/LS NC

H Fully Automatic Mitre Cutting Bandsawing Machine With Hydraulic Feeding System


S Fully Automatic Mitre Cutting Bandsawing Machine With Servo Feeding System

Standards

Blade 27
Blade 34
PLC Control Panel
Inverter
Planetary Gearbox
Sap Coolant Pump
Hydromechanical Blade Tension
Height Adjustmen Switch
Chip Brush
Security Switch
Hydraulic Vice

Optionals


Microspray Coolant
Hydraulic Blade Tension
Sensitive Pressure
Chip Conveyor
3 Mt Roller Table
Hydraulic Top Clamping
Hexagonal Vices



Microspray Coolant



Hydraulic Blade Tension



Sensitive Pressure



Chip Conveyor



3 Mt Roller Table



Hydraulic Top Clamping





Hexagonal Vices



Technical Datas

	BMSO 320 H NC/S NC				BMSO 320 LH NC/LS NC			
								
Cutting Capacity	0°	320	350 x 320	320	0°	320	610 x 320	320
Main Motor	2,2 kW				2,2 kW			
Hydraulic Motor	1,5 kW				1,5 kW			
Coolant Pump	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	3660 x 27 x 0,9 mm				4160 x 34 x 1,1 mm			
Working Height	700 mm				700 mm			
Dimensions	Lenght 2000 mm		Height 1250 mm		Lenght 2100 mm		Height 1250 mm	
	Width 1850 mm		Weight 1340 kg		Width 1850 mm		Weight 1585 kg	

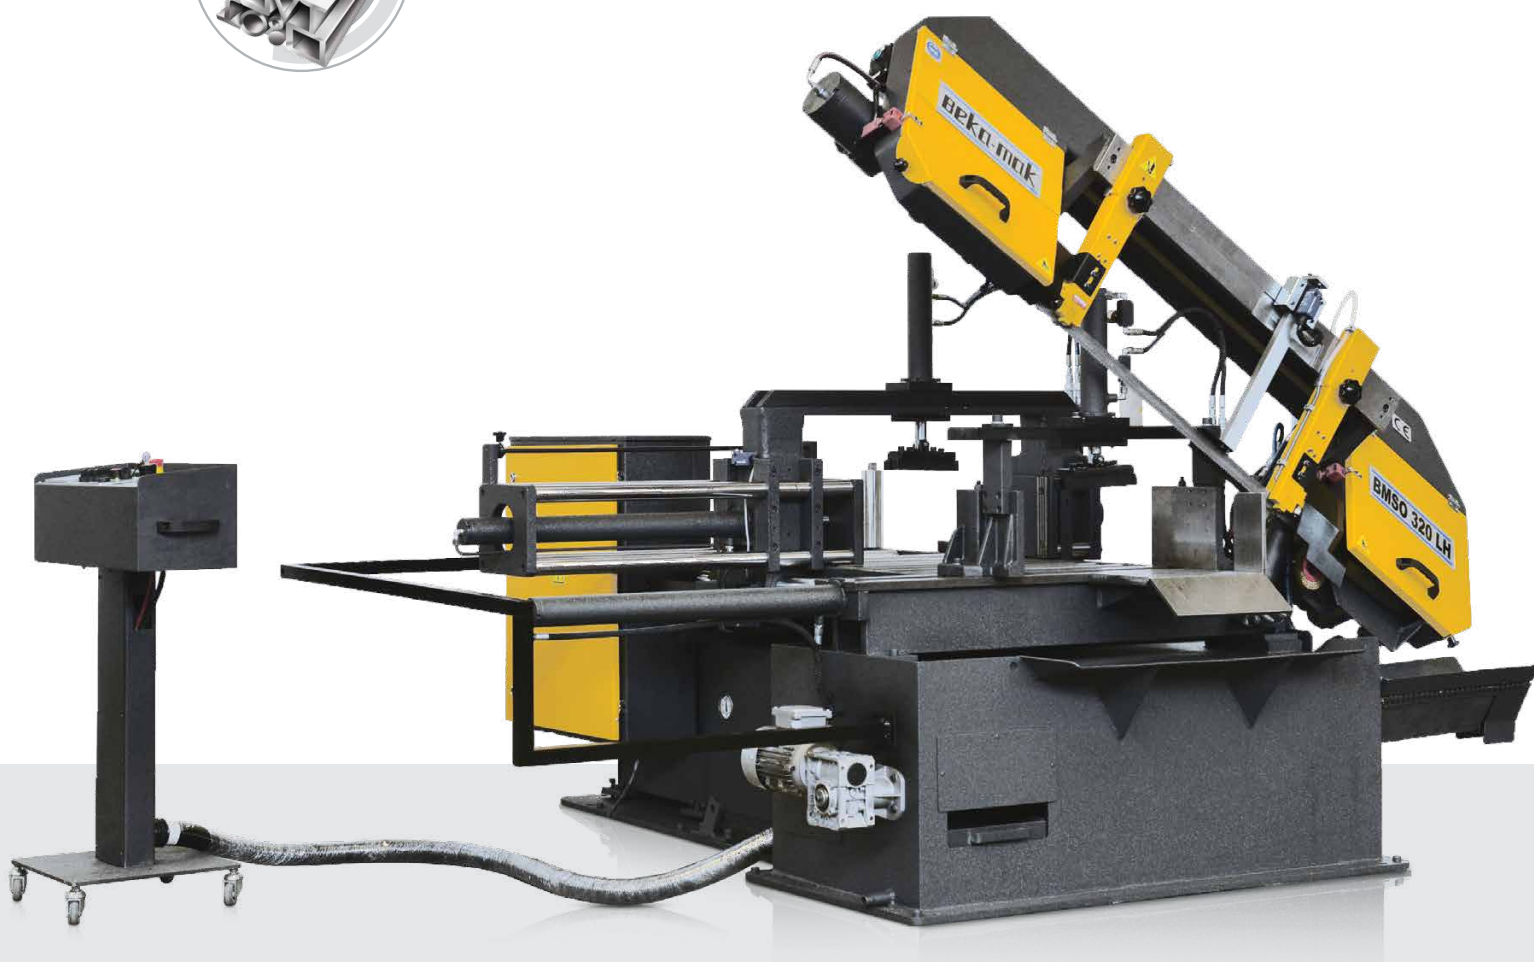

DOUBLE COLUMN SEMI AUTOMATIC DOUBLE MITRE BANDSAW MACHINES

**BMSY 650 DG NC - BMSY 750 DG NC - BMSY 560 DG
BMSY 560 DG NC- BMSY 440 CDGH
BMSY 440 CDGH NC - BMSY 360 CDGH**

High cutting performance with precise mitre cuts! Our semi-automatic double-sided bandsaw models allow two-sided, angled cuts without the material being tacked. In standard models, the head is rotated manually by turning the angle from the digital angle indicator. On the machines with NC option, the angle of the head is adjusted from the PLC control panel to save time.



Type	Page
BMSY 650 DG NC	36
BMSY 750 DG NC	37
BMSY 560 DG	38
BMSO 560 DG NC	38
BMSY 440 CDGH	39
BMSO 440 CDGH NC	39
BMSY 360 CDGH	40

BMSY 650 DG NC - BMSY 750 DG NC


Double Column Semi Automatic Double Mitre Bandsaw Machine

Standards

PLC Control Panel
Planetary Gearbox
Blade 54
Turn Table
Security Sensor Rope
Hydraulic Vice
Motorized Chip Brush
Security Switch
Synchronization Moveable Arm/Vice
Sensitive Pressure
Hydraulic Blade Tension
Inverter
Chip Conveyor
Linear Way
Height Adjustment Sensor
Security Switch In Case of Blade Stuck

Optionals

Laser Pointer
3 Mt Roller Table
3 Mt Motorized Roller Table
Microspray Coolant
Hydraulic Top Clamping





Technical Datas

BMSY 650 DG NC

BMSY 750 DG NC

									
Cutting Capacity	0°	650	1000 x 600	600	0°	800	1300 x 750	800	
	30°	650	840 x 600	600	30°	800	1070 x 750	770	
	45°	650	660 x 600	600	45°	800	850 x 750	770	
	60°	440	440 x 600	440	60°	570	570 x 750	570	
	-30°	650	840 x 600	600	-30°	800	1070 x 750	770	
	-45°	650	660 x 600	600	-45°	800	570 x 750	770	
Main Motor	7,5 kW				7,5 kW				
Hydraulic Motor	4 kW				4 kW				
Coolant Motor	0,12 kW				0,12 kW				
Angle Motor	0,37 kW				0,37 kW				
Chip Conveyor Motor	0,25 kW				0,25 kW				
Motorized Chip Brush	0,18 kW				0,18 kW				
Cutting Speeds	20 - 100 m/min				20 - 100 m/min				
Blade Size	8400 x 54 x 1,6 mm				9600 x 54 x 1,6 mm				
Working Height	880 mm				880 mm				
Dimensions	Lenght 4750 mm		Height 2630 mm		Lenght 5050 mm		Height 2900 mm		
	Width 1970 mm		Weight 6520 kg		Width 2200 mm		Weight 6700 kg		

Laser Pointer



3 Mt Roller Table



3 Mt Motorized Roller Table



Microspray Coolant



Hydraulic Top Clamping



BMSY 560 DG / BMSY 560 DG NC BMSY 440 CDGH / BMSY 440 CDGH NC


Semi Automatic Double Mitre Bandsaw Machine

Standards

PLC Control Panel (NC Model)	3° Inclined Bow
Planetary Gearbox	Turn Table
Hydraumechanical Blade Tension	Linear Way
Optical Quick Approaching	Security Switch
Chip Brush	Security Switch In Case of Blade Stuck
Sensitive Pressure	Sensitive Pressure
Synchronization Moveable Arm/Vice	SAP Coolant Pump
Inverter	Hydraulic Vice
Control Panel	Hydraulic Angle Fixing
Blade 41	

Optionals

Hydraulic Blade Tension
3 Mt Roller Table
3 Mt Motorized Roller Table
Hydraulic Top Clamping
Microspray Coolant
Laser Pointer
Chip Conveyor



Hydraulic Blade Tension



3 Mt Roller Table



3 Mt Motorized Roller Table



Hydraulic Top Clamping



Microspray Coolant



Laser Pointer




Chip Conveyor



Technical Datas

	BMSY 560 DG / DG NC				BMSY 440 CDGH / CDGH NC			
								
Cutting Capacity	0°	560	820 x 540	540	0°	440	640 x 440	440
	30°	560	705 x 540	540	30°	440	510 x 440	440
	45°	550	550 x 540	540	45°	440	400 x 440	400
	60°	360	360 x 540	360	60°	250	250 x 440	250
	-30°	500	705 x 540	540	-30°	440	510 x 440	440
	-45°	550	550 x 540	540	-45°	390	390 x 440	390
Main Motor	4 kW				4 kW			
Hydraulic Motor	1,5 kW				1,1 kW			
Coolant Motor	0,12 kW				0,12 kW			
Angle Motor	0,37 kW (NC Model)				-			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	6800 x 41 x 1,3 mm				5200 x 41 x 1,3 mm			
Working Height	880 mm				800 mm			
Dimensions	Lenght 3800 mm		Height 2350 mm		Lenght 3100 mm		Height 1910 mm	
	Width 1750 mm		Weight 3200 kg		Width 1200 mm		Weight 1780 kg	



BMSY 360 CDGH

Double Column Semi Automatic Double Mitre Bandsaw Machine


Standards

Inverter	Hydraumechanical Blade Tension
Control Panel	Linear Way
Sensitive Pressure	Planetary Gearbox
Blade 34	3° Inclined Bow
SAP Coolant Pump	Chip Brush
Security Switch	Hydraulic Angle Fixing
Optical Quick Approaching	Hydraulic Vice
Synchronization Moveable Arm/Vice	

Optionals

Hydraulic Blade Tension
3 Mt Motorized Roller Table
3 Mt Roller Table
Hydraulic Top Clamping
Laser Pointer
Microspray Coolant





Technical Datas

				
Cutting Capacity	0°	360	640 x 360	360
	30°	360	510 x 360	360
	45°	360	390 x 360	360
	60°	310	250 x 360	270
	-30°	360	510 x 360	360
	-45°	360	390 x 360	360
Main Motor	3 kW			
Hydraulic Motor	1,1 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	5000 x 34 x 1,1 mm			
Working Height	800 mm			
Dimensions	Lenght 3000 mm		Height 1910 mm	
	Width 1200 mm		Weight 1635 kg	



Hydraulic Blade Tension



3 Mt Motorized Roller Table



3 Mt Roller Table




Hydraulic Top Clamping



Laser Pointer



Microspray Coolant



HEAVY DUTY SEMI AUTOMATIC DOUBLE COLUMN BANDSAW MACHINES

BMSY 1515C - BMSY 1122C
BMSY 1313C - BMSY 1113C
BMSY 1110C

These models with world-class cutting times in heavy material cuts with robust body, solid bow, high efficiency motor and planetary gearbox are also smart choice for investment. They are suitable for cutting of profiles, tubes and solid material of all qualities and of materials which are difficult to cut (e.g. titanium, Hastelloy, Inconel).



Type	Page
BMSY 1515C	44
BMSY 1122C	46
BMSY 1313C	48
BMSY 1113C	50
BMSY 1110C	51

BMSY 1515C

Heavy Duty Semi Automatic Double Column Bandsaw Machine


Standards

Hydraulic Double Vice
Planetary Gearbox,
Piano Type Control Panel
Hydraulic Moveable Arm Guide
Idle Wheel Motion Detector For
Blade Stalling
Sensor for Blade Rupture
Led Lamp
Motorized Chip Brush
Palet Type Chip Conveyor

Optionals


3 Mt Motorized Roller Table
3 Mt Roller Table
Cutting Speed Display
2° Inclined Bow



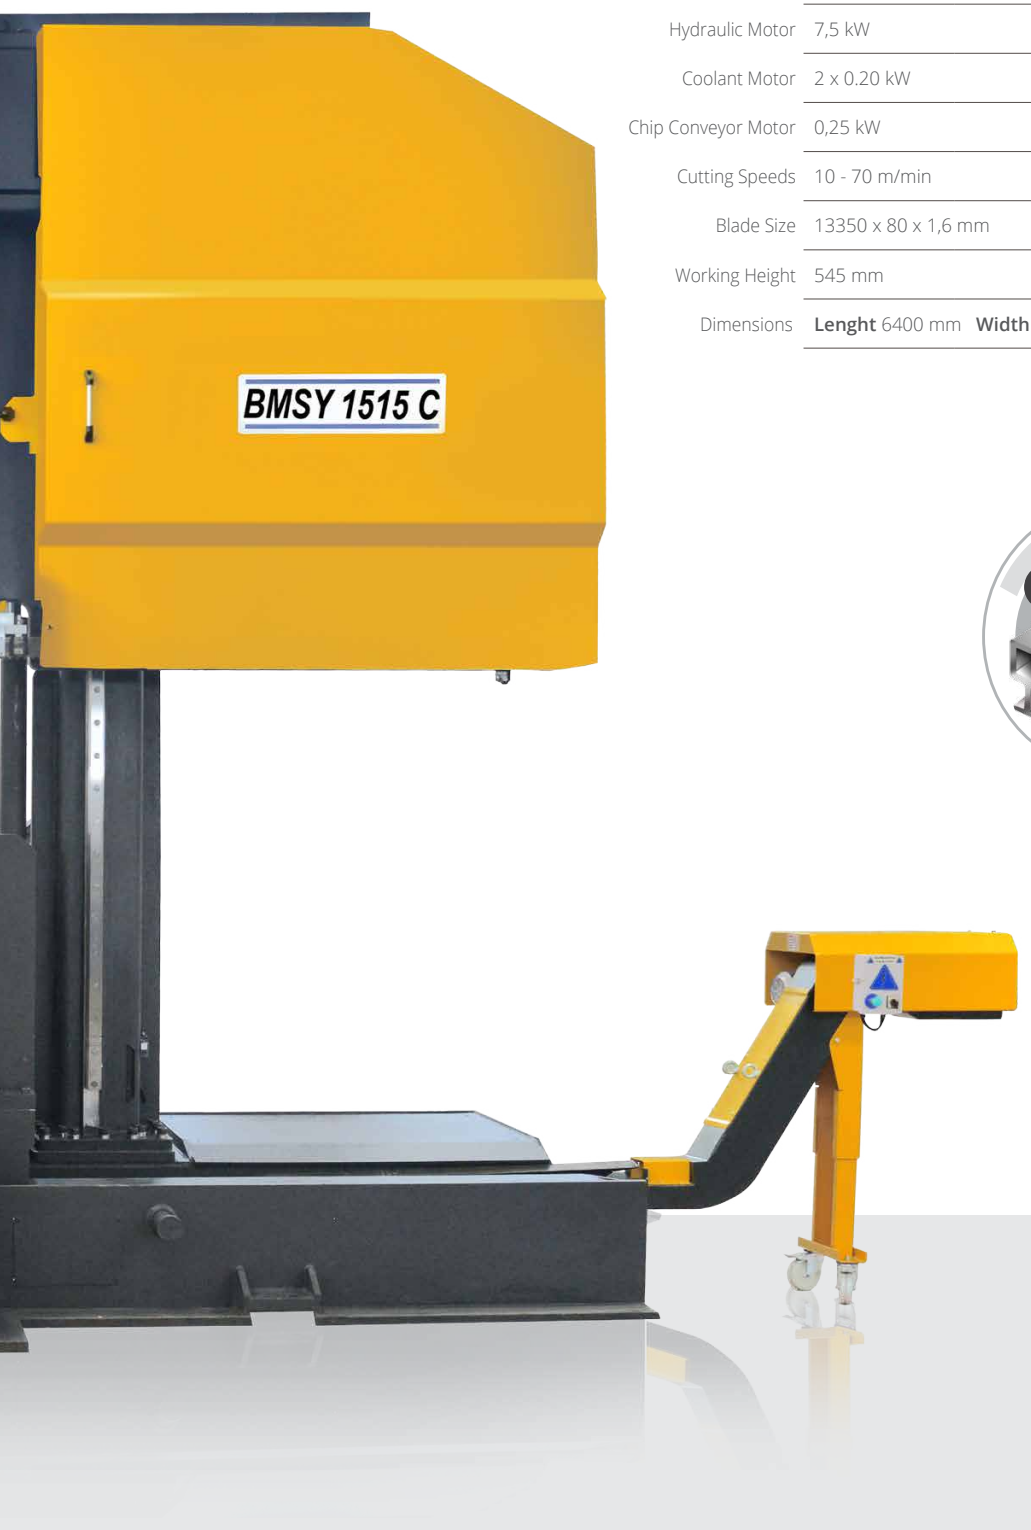

Technical Datas

				
Cutting Capacity	0°	1500	1510x1500	1500
Main Motor	15 kW			
Hydraulic Motor	7,5 kW			
Coolant Motor	2 x 0.20 kW			
Chip Conveyor Motor	0,25 kW			
Cutting Speeds	10 - 70 m/min			
Blade Size	13350 x 80 x 1,6 mm			
Working Height	545 mm			
Dimensions	Lenght 6400 mm Width 2400 mm Height 3650 mm Weight 25320 kg			



3 Mt Motorized Roller Table



3 Mt Roller Table





OPTIONALS

BMSY 1122C

Heavy Duty Semi Automatic Double Column Bandsaw Machine

Standards

Hydraulic Double Vice
Planetary Gearbox,
Piano Type Control Panel
Hydraulic Moveable Arm Guide
Idle Wheel Motion Detector For
Blade Stalling
Sensor for Blade Rupture
Led Lamp
Motorized Chip Brush
Palet Type Chip Conveyor




Optionals

4 Mt Infeed Roller Table
2 Mt Outfeed Roller Table
Deflection Sensor
Cutting Speed Display
2° Inclined Bow



Technical Datas

				
Cutting Capacity	0°	1100	1100 x 2300	1100
Main Motor	15 kW			
Hydraulic Motor	7,5 kW			
Coolant Motor	0,2 kW			
Chip Conveyor Motor	0,25 kW (Ops. 0,55 kW)			
Cutting Speeds	20 - 100 m/min			
Working Height	790			
Blade Size	13100 x 80 x 1,6 mm			
Dimensions	Lenght 7700 mm Width 1250 mm Height 3400 mm Weight 15700 kg			



3 Mt Motorized Roller Table



3 Mt Roller Table



OPTIONALS

BMSY 1313C

Heavy Duty Semi Automatic Double Column Bandsaw Machine

Standards

Planetary Gearbox
Hydraulic Vice
Security Switch
Inverter
Hydraulic Blade Tension
Synchronization Moveable Arm/Vice
Control Panel
Chip Conveyor
Linear Way
Height Adjustment Sensor
Chip Brush
Sensitive Pressure
Blade 67

Optionals


Hydraulic Double Vice
3 Mt Roller Table
3 Mt Motorized Roller Table
Laser Pointer
Hydraulic Top Clamping
Microspray Coolant





Technical Datas

				
Cutting Capacity	0°	1300	1300x1300	1300
Main Motor	11 kW			
Hydraulic Motor	7,5 kW			
Coolant Motor	0,2 kW			
Chip Conveyor Motor	0,25 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	12100 x 67 x 1,6 mm			
Working Height	545 mm			
Dimensions	Lenght 5300 mm		Height 3175 mm	
	Width 1500 mm		Weight 11500 kg	



Hydraulic Double Vice



3 Mt Roller Table



3 Mt Motorized Roller Table



Laser Pointer



Hydraulic Top Clamping



Microspray Coolant



BMSY 1113C - BMSY 1110C



Heavy Duty Semi Automatic Double Column Bandsaw Machine

Standards

Blade 67
Sensitive Pressure
Chip Brush
Height Adjustment Sensor
Security Switch In Case of Blade Stuck
Planetary Gearbox
Linear Way
Chip Conveyor
Control Panel
Synchronization Moveable Arm/Vice
Hydraulic Blade Tension
Inverter
Security Switch

Optionals

Hydraulic Double Vice
3 Mt Motorized Roller Table
3 Mt Roller Table
Microspray Coolant
Laser Pointer

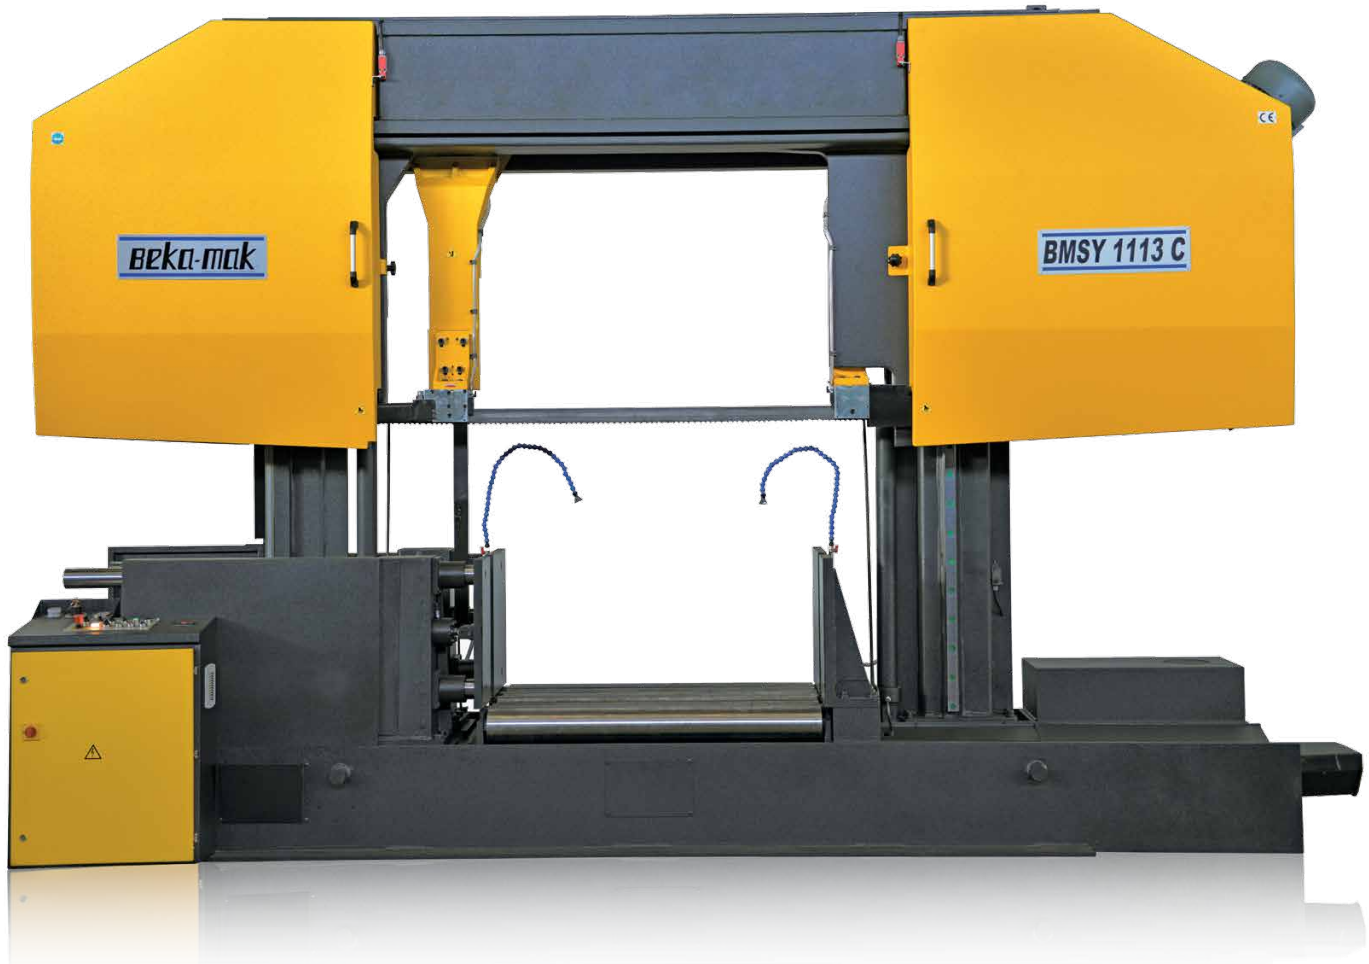

Hydraulic Double Vice



3 Mt Motorized Roller Table



3 Mt Roller Table




Microspray Coolant



Laser Pointer





Technical Datas

	BMSY 1113C				BMSY 1110C			
								
Cutting Capacity	0°	1110	1110 x 1300	1110	0°	1110	1110 x 1110	1110
Main Motor	11 kW				11 kW			
Hydraulic Motor	7,5 kW				4 kW			
Coolant Motor	0,20 kW				0,20 kW			
Chip Conveyor Motor	0,25 kW				0,25 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	10900 x 67 x 1,6 mm				10500 x 67 x 1,6 mm			
Working Height	545 mm				545 mm			
Dimensions	Lenght 5300 mm		Height 2975 mm		Lenght 4800 mm		Height 2975 mm	
	Width 1500 mm		Weight 11390 kg		Width 1500 mm		Weight 10440 kg	




SEMI AUTOMATIC DOUBLE COLUMN BANDSAW MACHINES

BMSY 1020C - BMSY 820C - BMSY 810C

BMSY 650C - BMSY 570C - BMSY 560C

BMSY 460C - BMSY 360C - BMSY 325C

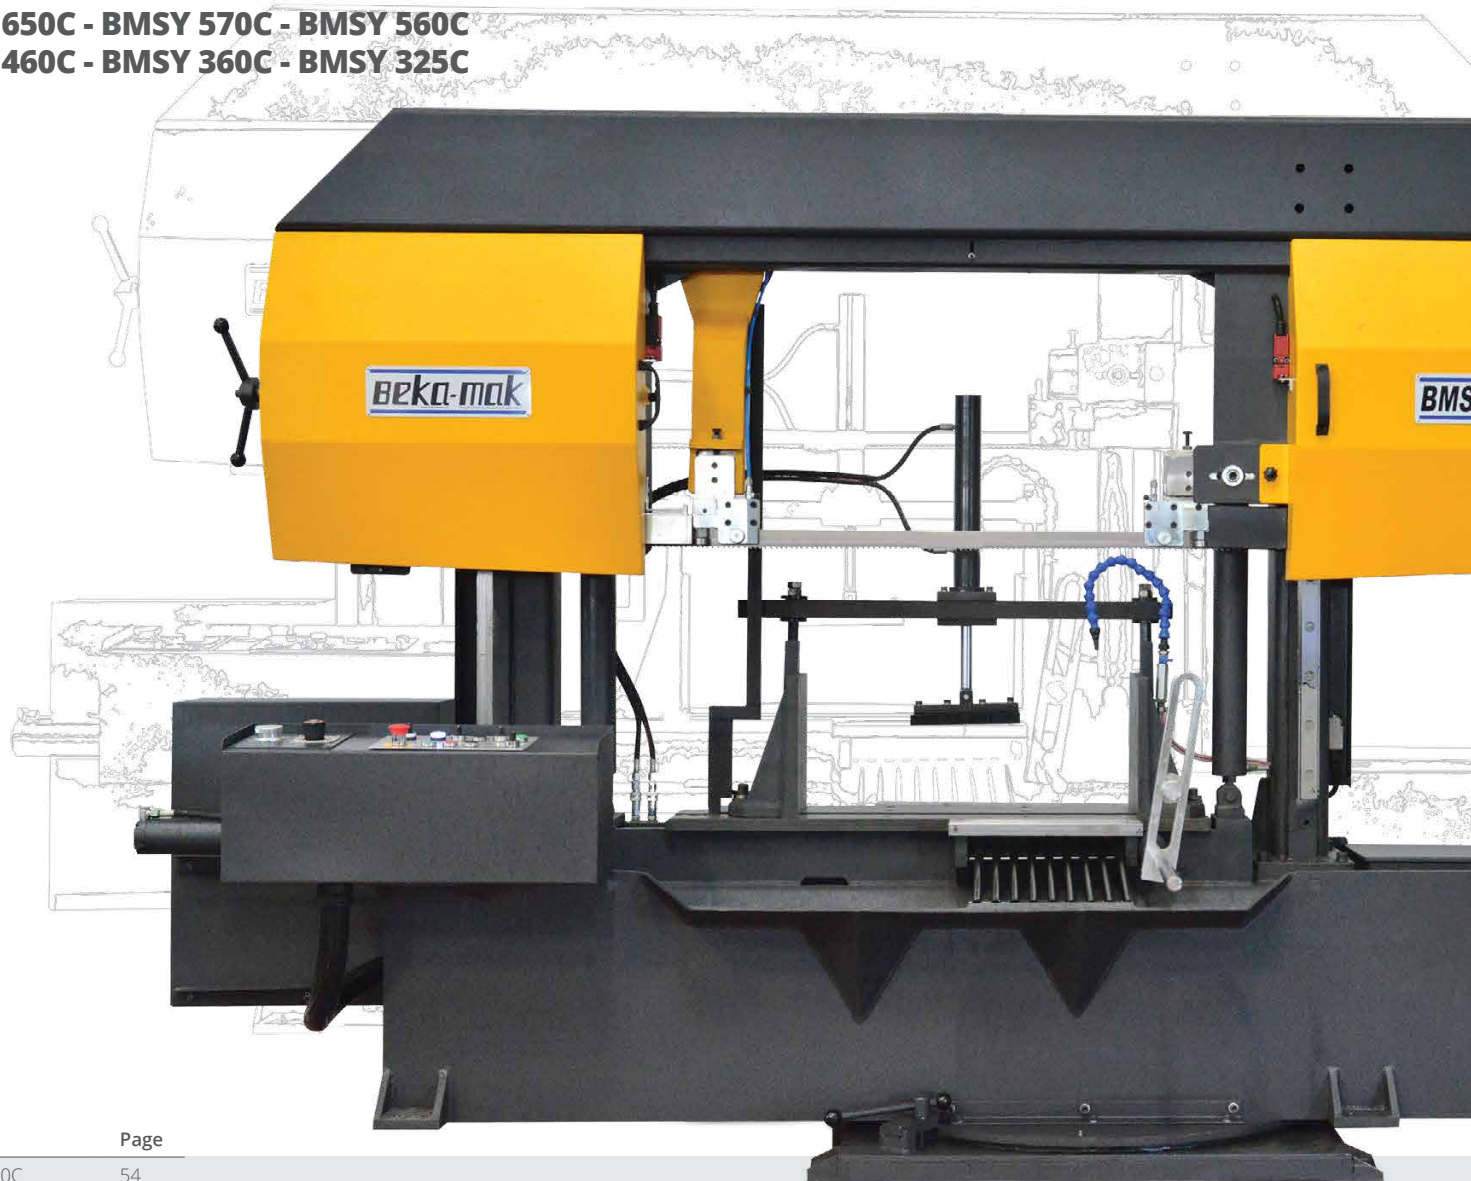

Type	Page
BMSY 1020C	54
BMSY 820C	56
BMSY 810C	58
BMSY 650C	60
BMSY 570C	61
BMSY 560C	61
BMSY 460C	62
BMSY 360C	64
BMSY 325C	65

BMSY 1020C

Semi Automatic Double Column Bandsaw Machine

Standards

Planetary Gearbox
Control Panel
Chip Brush
Linear Way
Sensitive Pressure
Hydraulic Blade Tension
Hydraulic Vice
Optical Quick Approaching
Inverter
SAP Coolant Pump
Security Switch
Blade 54

Optionals


Chip Conveyor
Laser Pointer
2° Inclined Bow
Microspray Coolant
3 Mt Motorized Roller Table
3 Mt Roller Table
Hydraulic Top Clamping





Technical Datas

				
Cutting Capacity	0°	1020	1020 x 1020	1020
Main Motor	7,5 kW			
Hydraulic Motor	2,2 kW			
Coolant Motor	0,12 kW			
Chip Conveyor Motor	0,25 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	9500 x 54 x 1,6 mm			
Working Height	535 mm			
Dimensions	Lenght 4500 mm	Width 1700 mm	Height 2750 mm	Weight 5860 kg



Chip Conveyor



Laser Pointer



2° Inclined Bow



Microspray Coolant



3 Mt Motorized Roller Table



3 Mt Roller Table



Hydraulic Top Clamping



BMSY 820C

Semi Automatic Double Column Bandsaw Machine

Standards

Planetary Gearbox
Hydraulic Vice
Synchronization Moveable Arm/Vice
Security Switch
Sensitive Pressure
Control Panel
Optical Quick Approaching
Inverter
Chip Brush
Linear Way
Length Stop
SAP Coolant Pump
1,2 mt Roller Table
Height Adjustment Sensor
Hydraumechanical Blade Tension
Sensitive Pressure
Hydraulic Blade Tension (BMSY 820 C)

Optionals

High Vices
Double Vice
Hexagonal Vices
Laser Pointer
Chip Conveyor
Hydraulic Top Clamping
3 Mt Motorized Roller Table
3 Mt Roller Table
Microspray Coolant
2° Inclined Bow
Turn Table



High Vices



Double Vice



Hexagonal Vices




Laser Pointer





Technical Datas

				
Cutting Capacity	0°	820	850 x 820	820
	45°	480	480 x 820	480
Main Motor	7,5 kW			
Hydraulic Motor	1,5 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	8200 x 54 x 1,6 mm			
Working Height	585 mm			
Dimensions	Lenght 3900 mm Width 1200 mm		Height 2350 mm Weight 3424 kg	



Chip Conveyor



Hydraulic Top Clamping



3 Mt Motorized Roller Table



3 Mt Roller Table



Microspray Coolant



2° Inclined Bow



Turn Table



BMSY 810C

Semi Automatic Double Column Bandsaw Machine

Standards

Planetary Gearbox
Hydraulic Vice
Synchronization Moveable Arm/Vice
Security Switch
Sensitive Pressure
Control Panel
Optical Quick Approaching
Inverter
Chip Brush
Linear Way
Length Stop
SAP Coolant Pump
1,2 mt Roller Table
Height Adjustment Sensor
Hydraumechanical Blade Tension
Sensitive Pressure
Hydraulic Blade Tension (BMSY 820 C)

Optionals

High Vices
Double Vice
Hexagonal Vices
Laser Pointer
Chip Conveyor
Hydraulic Top Clamping
3 Mt Motorized Roller Table
3 Mt Roller Table
Microspray Coolant
2° Inclined Bow
Turn Table
Hydraulic Blade Tension
Split Vice



High Vices



Double Vice



Hexagonal Vices



Laser Pointer




Chip Conveyor




Hydraulic Top Clamping



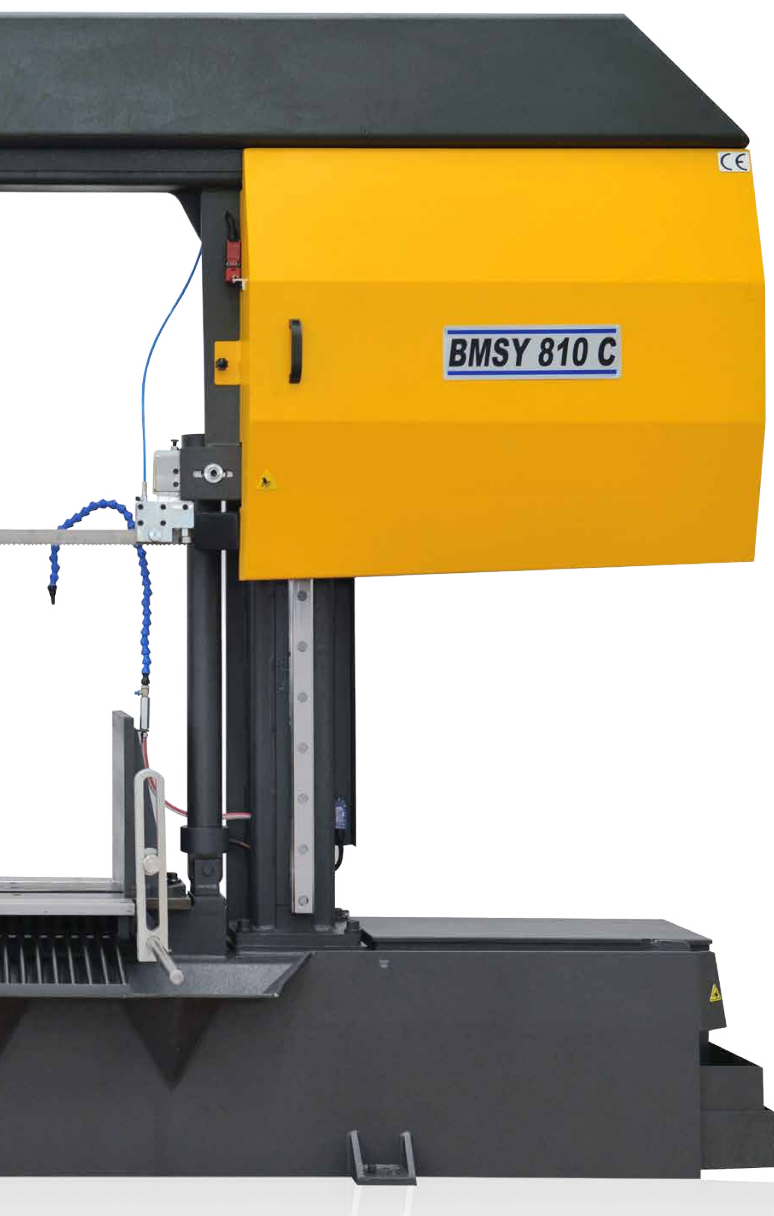

Technical Datas

				
Cutting Capacity	0°	810	850 x 810	810
	45°	480	480 x 810	480
Main Motor	4 kW			
Hydraulic Motor	1,5 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	8200x41x1,3 mm			
Working Height	585 mm			
Dimensions	Lenght 3900 mm		Height 2350 mm	
	Width 1200 mm		Weight 3080 kg	



3 Mt Motorized Roller Table



3 Mt Roller Table



Microspray Coolant



2° Inclined Bow



Turn Table



Hydraulic Blade Tension



Split Vice



BMSY 650C - BMSY 570C BMSY 560C


Semi Automatic Double Column Bandsaw Machine

Standards

Planetary Gearbox
Linear Way
Control Panel
Length Stop
SAP Coolant Pump
1,2 mt Roller Table
Hydraulic Vice
Hydraumechanical Blade Tension
Inverter
Sensitive Pressure
Chip Brush
Optical Quick Approaching

Optionals

Double Vice
Hexagonal Vices
Hydraulic Blade Tension
3 Mt Motorized Roller Table
Laser Pointer
Chip Conveyor
Hydraulic Top Clamping
3 Mt Roller Table
Microspray Coolant
Turn Table
2° Inclined Bow



Double Vice



Hexagonal Vices



Hydraulic Blade Tension



3 Mt Motorized Roller Table



Laser Pointer





Technical Datas

	BMSY 650C				BMSY 570C			
								
Cutting Capacity	0°	650	1000 x 600	600	0°	570	600 x 570	570
Main Motor	7,5 kW				7,5 kW			
Hydraulic Motor	4 kW				2,2 kW			
Coolant Motor	0,12 kW				0,2 kW			
Chip Conveyor Motor	0,25 kW				-			
Motorized Swarf Brush	0,18 kW				-			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	8400 x 54 x 1,6 mm				7400 x 54 x 1,6 mm			
Working Height	650 mm				700 mm			
Dimensions	Lenght 4750 mm		Height 2500 mm		Lenght 3450 mm		Height 2300 mm	
	Width 1970 mm		Weight 5300 kg		Width 1150 mm		Weight - kg	

Technical Datas

	BMSY 560C			
				
Cutting Capacity	0°	560	750 x 560	560
	45°	410	410 x 560	410
Main Motor	4 kW			
Hydraulic Motor	1,1 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	6000 x 41 x 1,3 mm			
Working Height	590 mm			
Dimensions	Lenght 3400 mm		Height 2050 mm	
	Width 1000 mm		Weight 2045 kg	

Chip Conveyor



Hydraulic Top Clamping



3 Mt Roller Table



Microspray Coolant



Turn Table



2° Inclined Bow



BMSY 460C

Semi Automatic Double Column Bandsaw Machine

Standards

Planetary Gearbox
Hydraulic Vice
Control Panel
Security Switch
Inverter
Linear Way
Hydraumechanical Blade Tension
Length Stop
SAP Coolant Pump
1,2 mt Roller Table
Chip Brush
Sensitive Pressure
Optical Quick Approaching

Optionals

High Vices
Double Vice
Hexagonal Vices
Hydraulic Top Clamping
3 Mt Motorized Roller Table
Laser Pointer
Chip Conveyor
3 Mt Roller Table
Microspray Coolant
Hydraulic Blade Tension
2° Inclined Bow
Turn Table
Split Vice



High Vices



Double Vice



Hexagonal Vices



Hydraulic Top Clamping




3 Mt Motorized Roller Table




Laser Pointer



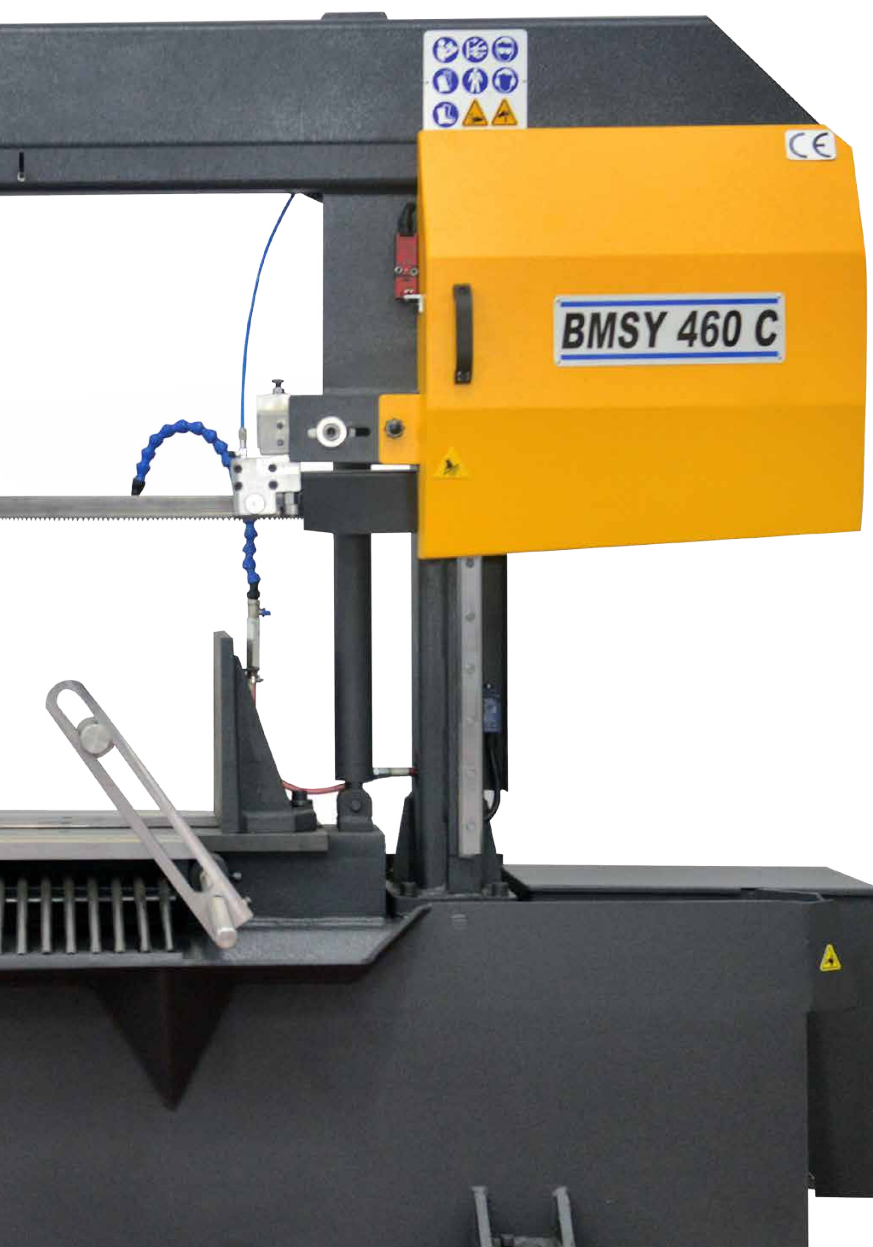

Technical Datas

				
Cutting Capacity	0°	460	650 x 460	460
	45°	380	380 x 460	380
Main Motor	4 kW			
Hydraulic Motor	0,55 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	5200 x 41 x 1,3 mm			
Working Height	590 mm			
Dimensions	Lenght 3100 mm Width 1000 mm		Height 1800 mm Weight 1520 kg	



Chip Conveyor



3 Mt Roller Table



Microspray Coolant



Hydraulic Blade Tension



2° Inclined Bow



Turn Table



Split Vice



BMSY 360C - BMSY 325C


Semi Automatic Double Column Bandsaw Machine

Standards

Planetary Gearbox	Hydraumechanical Blade Tension
Blade 34	Control Panel
Chip Brush	Optical Quick Approaching
Hydraulic Vice	SAP Coolant Pump
Inverter	Synchronization Moveable Arm/Vice
Security Switch	Linear Way
Length Stop	1,2 mt Roller Table
Sensitive Pressure	

Optionals

High Vices	Microspray Coolant
Double Vice	Hydraulic Blade Tension
Hexagonal Vices	2° Inclined Bow
Hydraulic Top Clamping	Turn Table
3 Mt Motorized Roller Table	Split Vice
Laser Pointer	
Chip Conveyor	
3 Mt Roller Table	



High Vices



Double Vice



Hexagonal Vices



Hydraulic Top Clamping



3 Mt Motorized Roller Table



Laser Pointer




Technical Datas

BMSY 360C

BMSY 325C

									
Cutting Capacity	0°	380	520 x 380	380	0°	325	450 x 325	325	
	45°	300	300 x 380	300	45°	250	250 x 325	250	
Main Motor	3 kW				2,2 kW				
Hydraulic Motor	0,55 kW				0,55 kW				
Coolant Motor	0,12 kW				0,12 kW				
Cutting Speeds	20 - 100 m/min				20 - 100 m/min				
Blade Size	4800 x 34 x 1,1 mm				4160 x 34 x 1,1 mm				
Working Height	590 mm				580 mm				
Dimensions	Lenght 2850 mm		Height 1660 mm		Lenght 2150 mm		Height 1500 mm		
	Width 930 mm		Weight 1330 kg		Width 860 mm		Weight 1010 kg		



Chip Conveyor



3 Mt Roller Table



Microspray Coolant



Hydraulic Blade Tension



2° Inclined Bow



Turn Table



Split Vice



FULLY AUTOMATIC DOUBLE COLUMN BANDSAW MACHINES

BMSO 820C - BMSO 810C
BMSO 560C - BMSO 460C
BMSO 360C - BMSO 325C



Type	Page
BMSO 820C	68
BMSO 810C	70
BMSO 560C	72
BMSO 460C	73
BMSO 360C	74
BMSO 325C	75

BMSO 820C

Fully Automatic Double Column Bandsaw Machine

Standards

Hydraulic Blade Tension
Inverter
Hydraulic Vice
Sensitive Pressure
1,2 mt Roller Table
Linear Way
Blade 54
Optical Quick Approaching

Chip Brush
Synchronization Moveable Arm/Vice
Length Stop
Control Panel
SAP Coolant Pump
Planetary Gearbox
Security Switch

Optionals


Chip Conveyor
Microspray Coolant
3 Mt Roller Table
Laser Pointer





Technical Datas

				
Cutting Capacity	0°	820	850 x 820	820
Main Motor	7,5 kW			
Hydraulic Motor	1,5 kW			
Feed Motor	0,55 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	8200 x 54 x 1,6 mm			
Working Height	585 mm			
Dimensions	Lenght 3900 mm Width 1200 mm Height 2350 mm Weight 3424 kg			



Chip Conveyor



Microspray Coolant



3 Mt Roller Table



Laser Pointer



BMSO 810C

Fully Automatic Double Column Bandsaw Machine


Standards

Hydraulic Blade Tension
Inverter
Hydraulic Vice
Sensitive Pressure
1,2 mt Roller Table
Linear Way
Blade 54
Optical Quick Approaching

Chip Brush
Synchronization Moveable Arm/Vice
Length Stop
Control Panel
SAP Coolant Pump
Planetary Gearbox
Security Switch

Optionals

Chip Conveyor
Microspray Coolant
3 Mt Roller Table
Laser Pointer

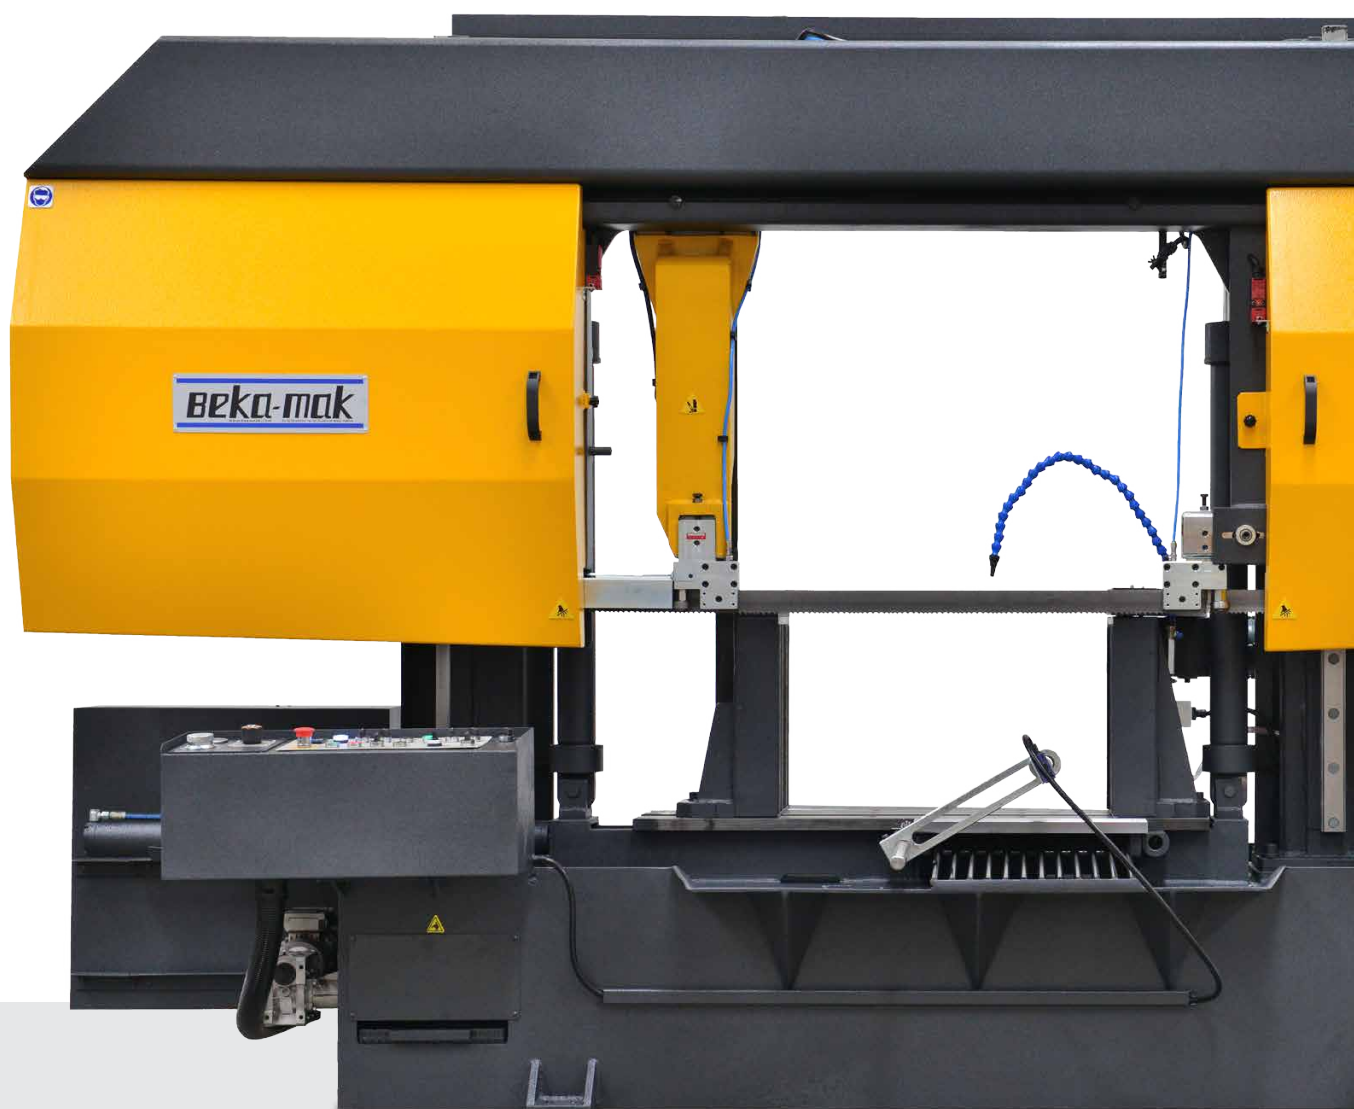



Technical Datas

				
Cutting Capacity	0°	810	850 x 810	810
Main Motor	4 kW			
Hydraulic Motor	1,5 kW			
Feed Motor	0,55 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	8200 x 41 x 1,3 mm			
Working Height	585 mm			
Dimensions	Lenght 3900 mm Width 1200 mm		Height 2350 mm Weight 3080 kg	

Chip Conveyor



Microspray Coolant



3 Mt Roller Table



Laser Pointer



BMSO 560C - BMSO 460C

Fully Automatic Double Column Bandsaw Machine


Standards

Planetary Gearbox
Blade 41
Linear Way
Control Panel
Hydraulic Vice
Hydraumechanical Blade Tension
Inverter
SAP Coolant Pump

Synchronization Moveable Arm/Vice
Mechanical Top Clamping
Length Stop
Sensitive Pressure
1,2 Mt Roller Table
Security Switch
Chip Brush
Optical Quick Approaching

Optionals

Chip Conveyor
Hydraulic Blade Tension
Microspray Coolant
3 Mt Roller Table
2° Inclined Bow
Laser Pointer



OPTIONALS

Laser Pointer



Chip Conveyor



Hydraulic Blade Tension



Microspray Coolant



3 Mt Roller Table




2° Inclined Bow



Technical Datas

	BMSO 560 C				BMSO 460 C			
								
Cutting Capacity	0°	560	570 x 560	560	0°	460	470 x 460	460
Main Motor	4 kW				4 kW			
Hydraulic Motor	1,1 kW				0,55 kW			
Feed Motor	0,55 kW				0,55 kW			
Coolant Motor	0,12 kW				0,12 kW			
Chip Conveyor Motor	0,25 kW				0,25 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	6000 x 41 x 1,3 mm				5200 x 41 x 1,3 mm			
Working Height	590 mm				590 mm			
Dimensions	Lenght 500 mm		Height 2050 mm		Lenght 3100 mm		Height 1800 mm	
	Width 1050 mm		Weight 2242 kg		Width 1000 mm		Weight 1655 kg	



BMSO 360C - BMSO 325C


Fully Automatic Double Column Bandsaw Machine

Standards

Blade 34
Synchronization Moveable Arm/Vice
Inverter
Security Switch
Hydraumechanical Blade Tension
Chip Brush
Linear Way
Length Stop
Hydraulic Vice
Control Panel
Mechanical Top Clamping
Height Adjustment Sensor
Sensitive Pressure
SAP Coolant Pump
1,2 Mt Roller Table

Optionals

Chip Conveyor
3 Mt Roller Table
Hydraulic Blade Tension
Microspray Coolant



Chip Conveyor



3 Mt Roller Table



Hydraulic Blade Tension



Microspray Coolant




Technical Datas

BMSO 360C


BMSO 325C

									
Cutting Capacity	0°	380	430 x 380	380		0°	325	350x325	325
Main Motor	3 kW					2,2 kW			
Hydraulic Motor	0,55 kW					0,55 kW			
Feed Motor	0,25 kW					0,25 kW			
Coolant Motor	0,12 kW					0,12 kW			
Chip Conveyor Motor	0,25 kW					-			
Cutting Speeds	20 - 100 m/min					20 - 100 m/min			
Blade Size	4800 x 34 x 1,1 mm					4160 x 34 x 1,1 mm			
Working Height	590 mm					580 mm			
Dimensions	Lenght 2850 mm		Height 1660 mm			Lenght 2450 mm		Height 1500 mm	
	Width 930 mm		Weight 1330 kg			Width 900 mm		Weight 1030 kg	



SEMI AUTOMATIC MITRE CUTTING BANDSAW MACHINES

BMSY 810 CGH - BMSY 540 CGH - BMSY 440 CGH
BMSY 360 CGH - BMSY 325 CGH
BMSY 320 GL - BMSY 320 G - BMS 320 G

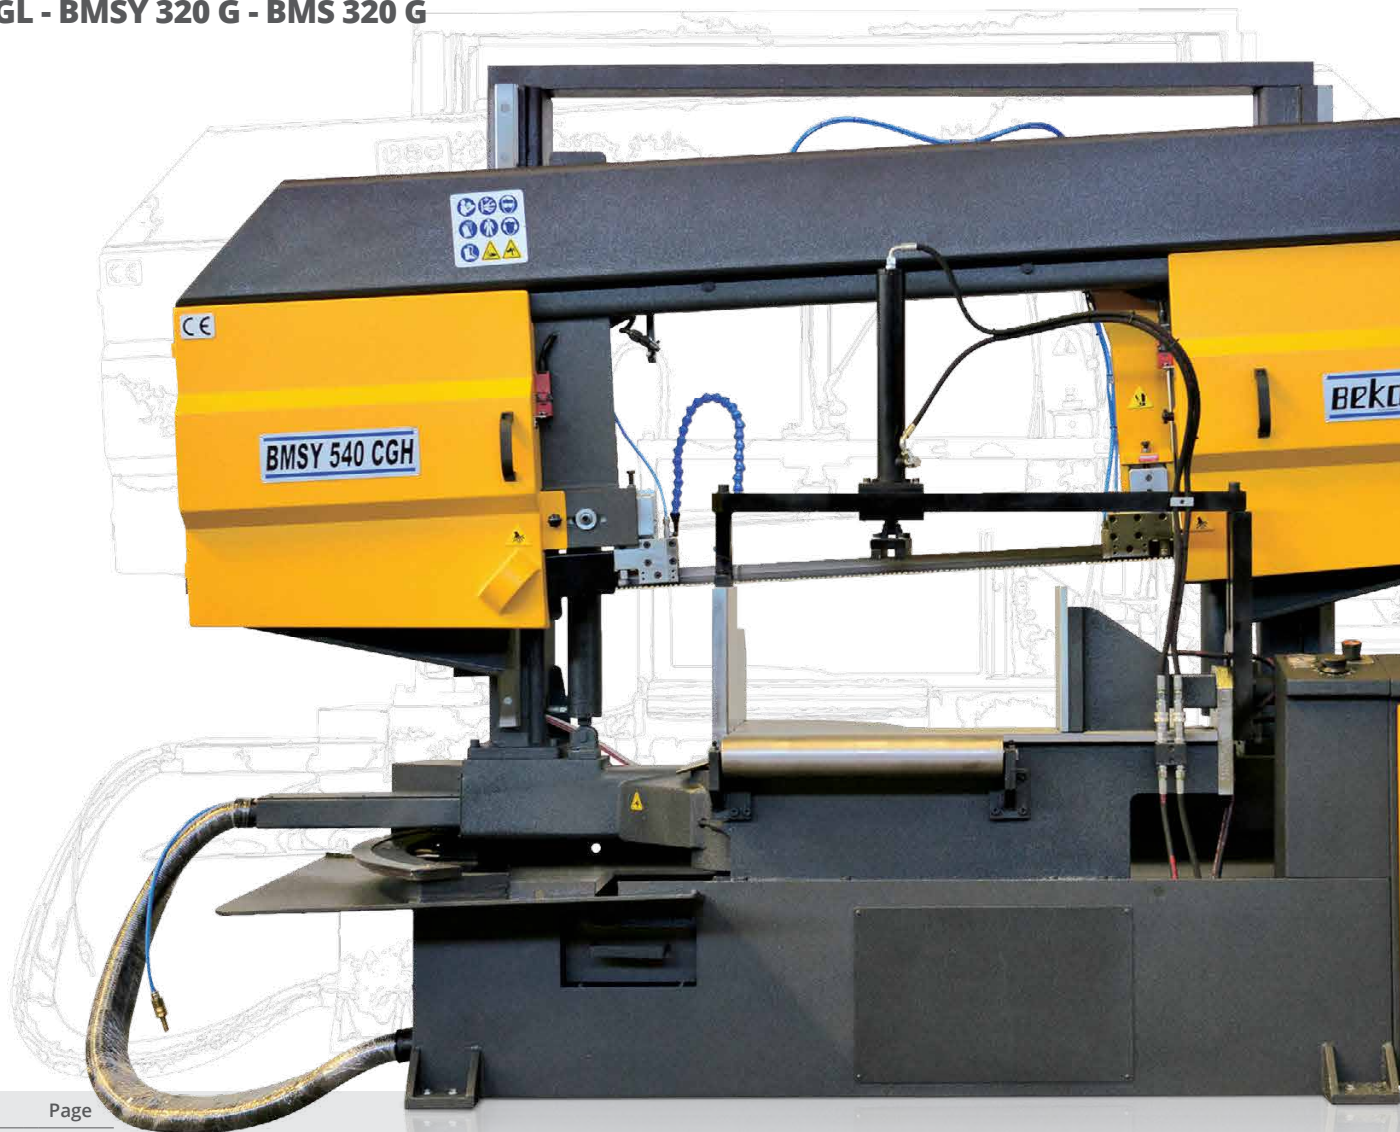

Type	Page
BMSY 810 CGH	78
BMSY 540 CGH	80
BMSY 440 CGH	82
BMSY 360 CGH	83
BMSY 325 CGH	84
BMSY 320 GL	85
BMSY 320 G	86
BMS 320 G	87

BMSY 810 CGH

Semi Automatic Mitre Cutting Bandsaw Machine

Standards

Planetary Gearbox
Digital Angle Display
Blade 41
Hydraulic Vice
Hydraulic Angle Fixing
Inverter
Hydraumechanical Blade Tension
Security Switch
Synchronization Moveable Arm/Vice
Linear Way
Sensitive Pressure
Control Panel
SAP Coolant Pump
3° Inclined Bow
Chip Brush

Optionals


Hydraulic Blade Tension
Hydraulic Top Clamping
Laser Pointer
Chip Conveyor
3 Mt Motorized Roller Table
3 Mt Roller Table
Microspray Coolant





Technical Datas

				
Cutting Capacity	0°	810	750 x 910	750
	30°	760	740 x 750	740
	45°	600	750 x 600	600
	60°	360	750 x 360	360
Main Motor	4 kW			
Hydraulic Motor	1,5 kW			
Coolant Motor	0,12 kW			
Chip Conveyor Motor	0,25 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	8200 x 41 x 1,3 mm			
Working Height	725 mm			
Dimensions	Lenght 4020 mm	Width 1600 mm	Height 2450 mm	Weight 3970 kg



Microspray Coolant



Hydraulic Blade Tension



Hydraulic Top Clamping



Laser Pointer



Chip Conveyor



3 Mt Motorized Roller Table



3 Mt Roller Table



BMSY 540 CGH


Semi Automatic Mitre Cutting Bandsaw Machine

Standards

- Planetary Gearbox
- Digital Angle Display
- Inverter
- Linear Way
- Sensitive Pressure
- Hydraulic Angle Fixing
- Control Panel
- Blade 41
- Hydraulic Vice
- Synchronization Moveable Arm/Vice
- Hydraumechanical Blade Tension
- Security Switch
- Chip Brush
- 3° Inclined Bow
- Optical Quick Approaching

Optionals


- Hydraulic Top Clamping
- Hydraulic Blade Tension
- Laser Pointer
- 3 Mt Motorized Roller Table
- 3 Mt Roller Table
- Microspray Coolant

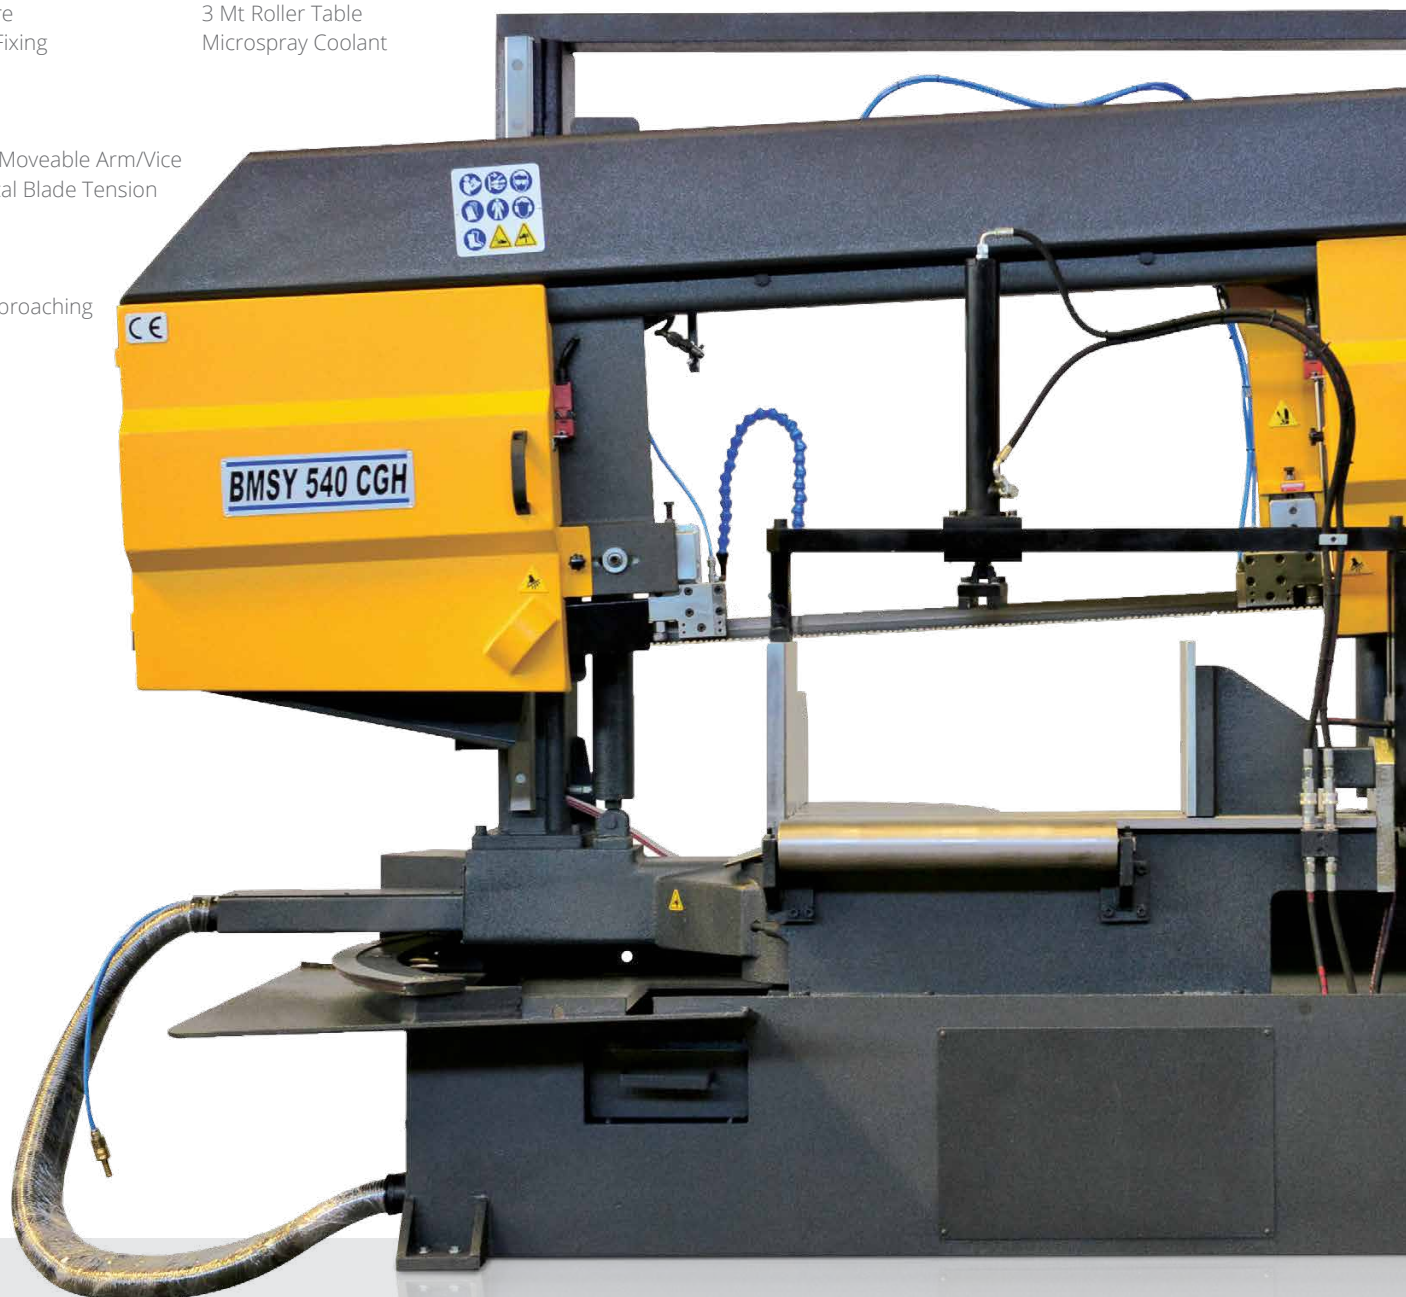



Technical Datas

				
Cutting Capacity	0°	540	750 x 540	540
	30°	540	600 x 540	540
	45°	510	450 x 540	450
	60°	270	250 x 540	250
Main Motor	4 kW			
Hydraulic Motor	1,1 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	6000 x 41 x 1,3 mm			
Working Height	695 mm			
Dimensions	Lenght 3000 mm	Width 1300 mm	Height 2150 mm	Weight 2445 kg



Hydraulic Top Clamping



Hydraulic Blade Tension



Laser Pointer



3 Mt Motorized Roller Table



3 Mt Roller Table



Microspray Coolant



BMSY 440 CGH - BMSY 360 CGH


Semi Automatic Mitre Cutting Bandsaw Machine

Standards

- Planetary Gearbox
Linear Way
Hydraumechanical Blade Tension
Synchronization Moveable Arm/Vice
Chip Brush
Digital Angle Display
Inverter
Control Panel
Sensitive Pressure
Hydraulic Angle Fixing
- Blade 41
SAP Coolant Pump
Security Switch
Optical Quick Approaching
3° Inclined Bow
Hydraulic Vice
Synchronization Moveable Arm/Vice
Blade 34

Optionals

- Microspray Coolant
Hydraulic Blade Tension
Laser Pointer
3 Mt Motorized Roller Table
3 Mt Roller Table
Chip Conveyor
Hydraulic Top Clamping



Microspray Coolant



Hydraulic Blade Tension



Laser Pointer



3 Mt Motorized Roller Table



3 Mt Roller Table



Chip Conveyor




Hydraulic Top Clamping



OPTIONALS

Technical Datas

	BMSY 440 CGH				BMSY 360 CGH			
								
Cutting Capacity	0°	450	695 x 425	425	0°	360	700 x 360	360
	30°	450	560 x 425	425	30°	360	590 x 360	360
	45°	430	430x 425	425	45°	360	450 x 360	360
	60°	320	260 x 425	290	60°	325	280 x 360	290
Main Motor	4 kW				3 kW			
Hydraulic Motor	0,55 kW				0,55 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	5400 x 41 x 1,3 mm				5200 x 34 x 1,1 mm			
Working Height	690 mm				690 mm			
Dimensions	Lenght 2850 mm		Height 1800 mm		Lenght 2850 mm		Height 1820 mm	
	Width 1300 mm		Weight 1630 kg		Width 1300 mm		Weight 1460 kg	



BMSY 325 CGH - BMSY 320 GL


Semi Automatic Mitre Cutting Bandsaw Machine

Standards

Linear Way	2° Inclined Bow
Sensitive Pressure	Inverter
Blade 34	Digital Angle Display
SAP Coolant Pump	Hydraulic Angle Fixing
Security Switch	Control Panel
Hydraumechanical Blade Tension	Height Adjustment Switch
Chip Brush	Length Stop
Hydraulic Vice	Digital Angle Display
Optical Quick Approaching	1,2 Mt Roller Table
Synchronization Moveable Arm/Vice	

Optionals

Microspray Coolant
Hydraulic Top Clamping
Hydraulic Blade Tension
Chip Conveyor
Laser Pointer
3 Mt Roller Table
3 Mt Motorized Roller Table
Sensitive Pressure



Microspray Coolant



Hydraulic Top Clamping



Hydraulic Blade Tension




Chip Conveyor



Laser Pointer



3 Mt Roller Table




3 Mt Motorized Roller Table



Technical Datas

	BMSY 325 CGH				BMSY 320 GL			
								
Cutting Capacity	0°	325	400 x 320	320	0°	320	610 x 320	320
	30°	325	360 x 320	320	30°	260	280 x 200	225
	45°	305	270 x 320	270	45°	320	355 x 320	320
	60°	190	180 x 240	180	60°	320	510 x 320	320
	-	-	-	-	75°	320	580 x 320	320
Main Motor	2,2 kW				2,2 kW			
Hydraulic Motor	0,55 kW				0,37 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	4380 x 34 x 1,1 mm				4160 x 34 x 1,1 mm			
Working Height	640				740 mm			
Dimensions	Lenght 2100 mm		Height 1600 mm		Lenght 2100 mm		Height 1350 mm	
	Width 1300 mm		Weight 1185 kg		Width 1200 mm		Weight 1195 kg	



Hydraulic Top Clamping



Microspray Coolant



Hydraulic Blade Tension



Sensitive Pressure



3 Mt Roller Table



BMSY 320 G - BMS 320 G


Semi Automatic Mitre Cutting - Manual Mitre Cutting Bandsaw Machine

Standards

Security Switch
Digital Angle Display
Height Adjustment Switch
Control Panel
Length Stop
SAP Coolant Pump
Hydraulic Vice
Inverter
Blade 27
Planetary Gearbox
Hydraumechanical Blade Tension
1,2 Mt Roller Table
Chip Brush


Optionals

Hydraulic Top Clamping
Microspray Coolant
Hydraulic Blade Tension
Sensitive Pressure
3 Mt Roller Table



Technical Datas

	BMSY 320 G				BMS 320 G			
								
Cutting Capacity	0°	320	350 x 320	320	0°	320	350 x 320	320
	30°	160	150 x 150	150	30°	160	150 x 150	150
	45°	260	250 x 180	180	45°	260	250 x 180	180
	60°	300	300 x 200	250	60°	300	300 x 200	250
	75°	320	350 x 200	300	75°	320	350 x 200	300
Main Motor	1,5 kW				1,5 kW			
Hydraulic Motor	0,37 kW				-			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	3660 x 27 x 0,9 mm				36600 x 34 x 1,1 mm			
Working Height	740 mm				740 mm			
Dimensions	Lenght 1900 mm		Height 1350 mm		Lenght 1900 mm		Height 1350 mm	
	Width 1200 mm		Weight 1015 kg		Width 1200 mm		Weight 960 kg	



Hydraulic Top Clamping



Microspray Coolant



Hydraulic Blade Tension



Sensitive Pressure




3 Mt Roller Table



SEMI AUTOMATIC DOUBLE MITRE CUTTING PIVOT TYPE BANDSAW MACHINES

BMSY 440 DGH / BMSY 440 DGH NC
BMSY 360 DGH - BMSY 360 DGH ECO
BMSY 270 DGH - BMSY 270 DG - BMS 270 DG
BMSY 230 DGH - BMSY 230 DG - BMS 230 DG

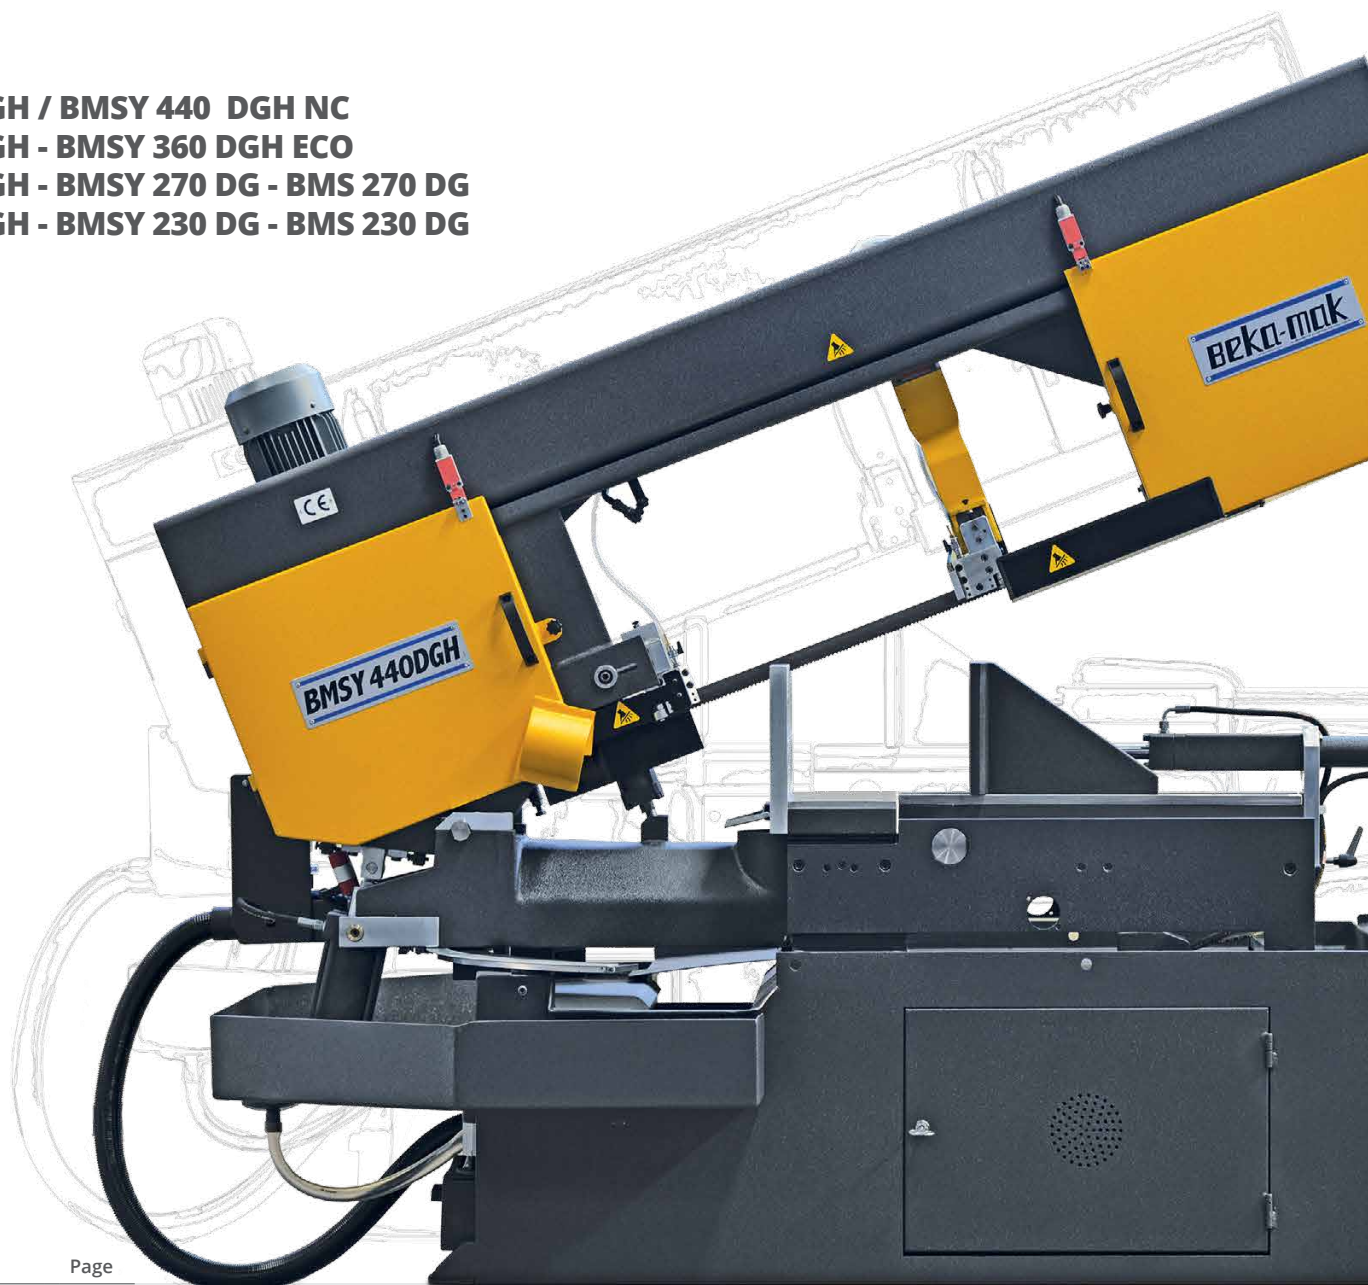

Type	Page
BMSY 440 DGH / DGH NC	90
BMSY 360 DGH	92
BMSY 360 DGH ECO	93
BMSY 270 DGH	94
BMSY 270 DG	94
BMS 270 DG	95
BMSY 230 DGH	96
BMSY 230 DG	96
BMS 230 DG	97

BMSY 440 DGH / DGH NC


Semi Automatic Double Mitre Cutting Pivot Type Bandsaw Machine

Standards

Blade 34
Control Panel
Chip Brush
Inverter
Security Switch
Hydraumechanical Blade Tension
Linear Way Arm Guide
Hydraulic Vice
Vibration Cylinder
Height Adjustment Sensor
Planetary Gearbox
SAP Coolant Pump
Synchronization Movable Arm/Vice
Sensitive Pressure
NC Control Panel (NC Model)

Optionals

Hydraulic Blade Tension
Height Adjustment Sensor
3 Mt Motorized Roller Table
3 Mt Roller Table
Laser Pointer
Microspray Coolant



Technical Datas

	BMSY 440 DGH				BMSY 440 DGH NC			
								
Cutting Capacity	0°	-	440 x 610	440	0°	440	440 x 610	440
	30°	440	440 x 500	440	30°	440	440 x 500	440
	45°	410	440 x 410	410	45°	410	440 x 410	410
	60°	320	440 x 250	250	60°	320	440 x 250	250
	-30°	440	440 x 500	440	-30°	440	440 x 500	440
	-45°	410	440 x 410	410	-45°	410	440 x 410	410
	-60°	320	440 x 285	285	-60°	320	440 x 285	285
Main Motor	3 kW				3 kW			
Hydraulic Motor	0,55 kW				0,55 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	5000 x 34 x 1,1 mm				5200 x 34 x 1,1 mm			
Working Height	860 mm				860 mm			
Dimensions	Lenght 2750 mm		Height 1870 mm		Lenght 2800 mm		Height 1870 mm	
	Width 1210 mm		Weight 1195		Width 1210 mm		Weight 1640 kg	



Hydraulic Blade
Tension



Height Adjustment
Sensor



3 Mt Motorized Roller
Table



3 Mt Roller Table



Laser Pointer



Microspray Coolant



BMSY 360 DGH - BMSY 360 DGH ECO

Semi Automatic Double Mitre Cutting Pivot Type Bandsaw Machine


Standards

Blade 34
Sensitive Pressure
Inverter
Chip Brush
Security Switch
Hydraumechanical Blade Tension
Linear Way Arm Guide
Hydraulic Vice

Vibration Cylinder
Control Panel
Planetary Gearbox
SAP Coolant Pump
Height Adjustment Switch
Digital Angle Display
Hareketli Kumanda

Optionals

Hydraulic Blade Tension
Height Adjustment Sensor
3 Mt Motorized Roller Table
3 Mt Roller Table
Laser Pointer
Microspray Coolant



Hydraulic Blade
Tension



Height Adjustment
Sensor



3 Mt Motorized Roller
Table



3 mt Roller Table



Laser Pointer



Microspray Coolant



Technical Datas

	BMSY 360 DGH				BMSY 360 DGH ECO			
								
Cutting Capacity	0°	360	610 x 360	360	0°	360	510 x 360	360
	30°	360	610 x 360	360	30°	360	510 x 360	360
	45°	360	490 x 360	360	45°	360	390 x 360	360
	60°	340	300 x 360	300	60°	200	200 x 360	200
	-30°	360	610 x 360	360	-30°	360	510 x 360	360
	-45°	360	490 x 360	360	-45°	360	390 x 360	360
	-60°	360	360 x 360	360	-60°	260	260 x 360	260
Main Motor	3 kW				3 kW			
Hydraulic Motor	0,55 kW				0,37 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	5000 x 34 x 1,1 mm				4800 x 34 x 1,1 mm			
Working Height	860 mm				860 mm			
Dimensions	Lenght 2750 mm		Height 1870 mm		Lenght 2800 mm		Height 1870 mm	
	Width 1210 mm		Weight 1470		Width 1210 mm		Weight 1450 kg	



BMSY 270 DGH - BMSY 270 DG


Semi Automatic Double Mitre Cutting Pivot Type Bandsaw Machine
DGH - Hydraulic Vice Standard

Standards

Blade 27
Height Adjustment Switch
Planetary Gearbox
SAP Coolant Pump
Control Pedal
Control Panel
Length Stop
Hydraumechanical Blade Tension
Chip Brush
Security Switch

Optionals


3 Mt Roller Table
Inverter
Microspray Coolant

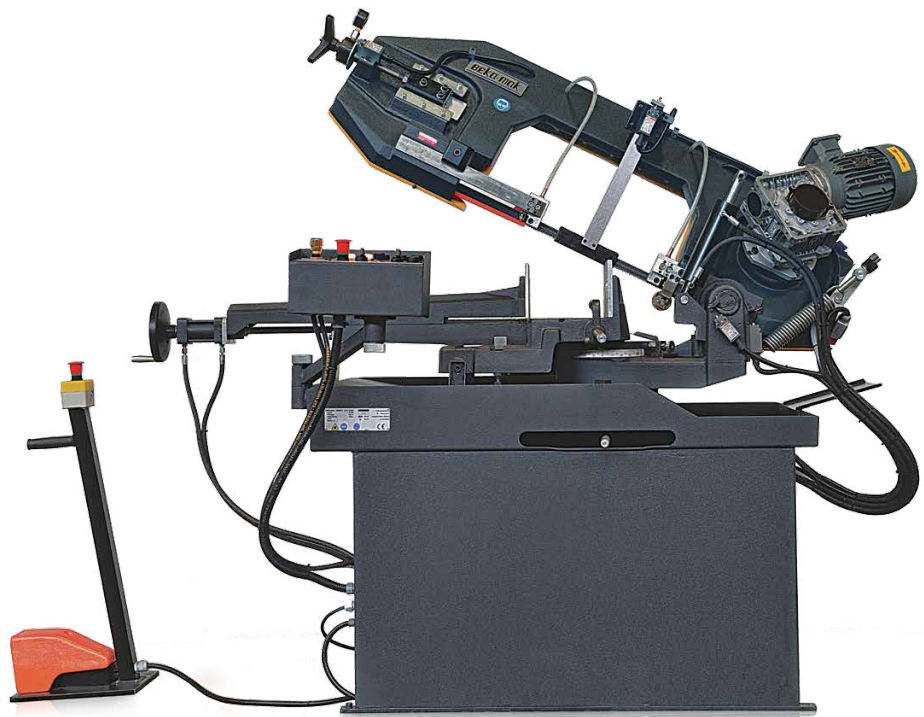

BMSY 270 DGH



BMSY 270 DG



BMS 270 DG


Manual Double Mitre Cutting Pivot Type Bandsaw Machine

Standards

Hydraumechanical Blade Tension
Blade 27
Inverter
Chip Brush
Security Switch
Length Stop
SAP Coolant Pump
Control Panel

Optionals

3 Mt Roller Table
Microspray Coolant



Technical Datas

	BMSY 270 DGH				BMSY 270 DG				BMS 270 DG			
												
Cutting Capacity	0°	270	350x220	270	0°	270	350x220	270	0°	270	350x220	270
	45°	240	270x200	170	45°	240	270x200	170	45°	240	270x200	170
	60°	150	150x100	100	60°	150	150x100	100	60°	150	150x100	100
	-45°	210	270x210	180	-45°	210	270x210	180	-45°	210	270x210	180
Main Motor	1,5 kW				1,5 kW				1,5 kW			
Hydraulic Motor	0,37 kW				0,37 kW				-			
Coolant Motor	0,12 kW				0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min				20 - 100 m/min			
Blade Size	3160x27x0,9 mm				3160x27x0,9 mm				3160x27x0,9 mm			
Working Height	910 mm				910 mm				910 mm			
Dimensions	Lenght 1730 mm		Height 1460 mm		Lenght 1730 mm		Height 1460 mm		Lenght 1730 mm		Height 1460 mm	
	Width 770 mm		Weight 525 kg		Width 770 mm		Weight 476 kg		Width 770 mm		Weight 465 kg	

3 Mt Roller Table



Inverter



Microspray Coolant



BMSY 230 DGH - BMSY 230 DG



*Semi Automatic Double Mitre Cutting Pivot Type Bandsaw Machine
DGH - Hydraulic Vice Standard*

Standards


Blade 27
Inverter
Chip Brush
Hydraumechanical Blade Tension
Security Switch
Control Panel
SAP Coolant Pump
Planetary Gearbox
Height Adjustment Switch
Length Stop

Optionals

3 Mt Roller Table
Inverter
Microspray Coolant

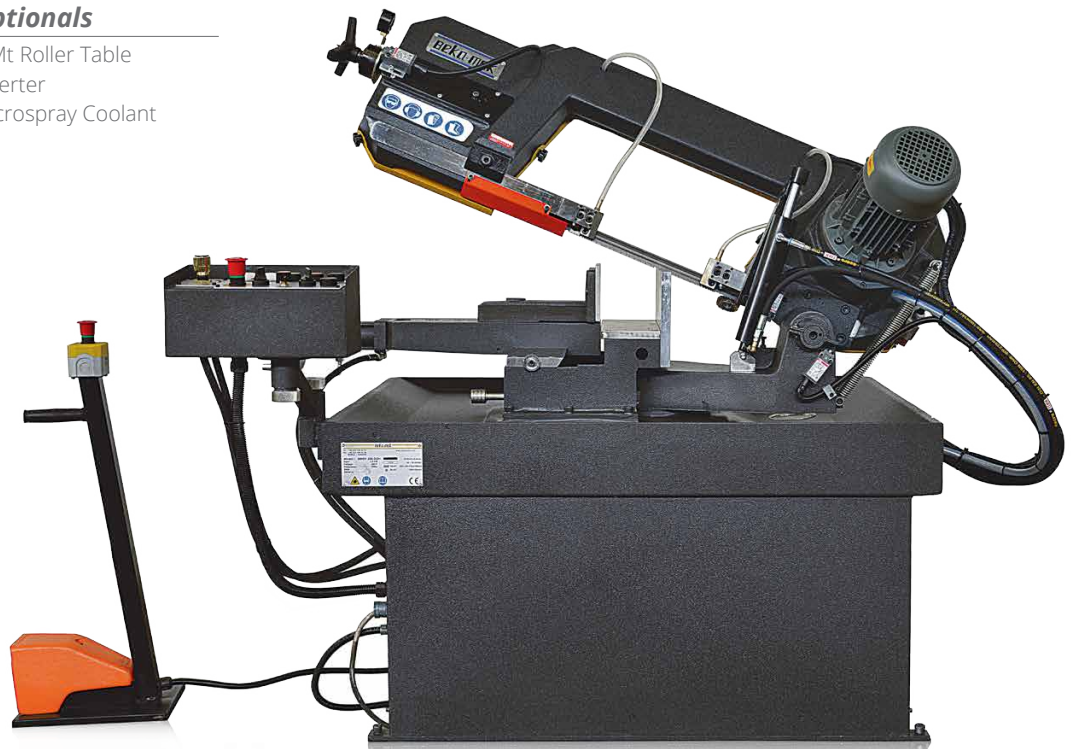

BMSY 230 DGH

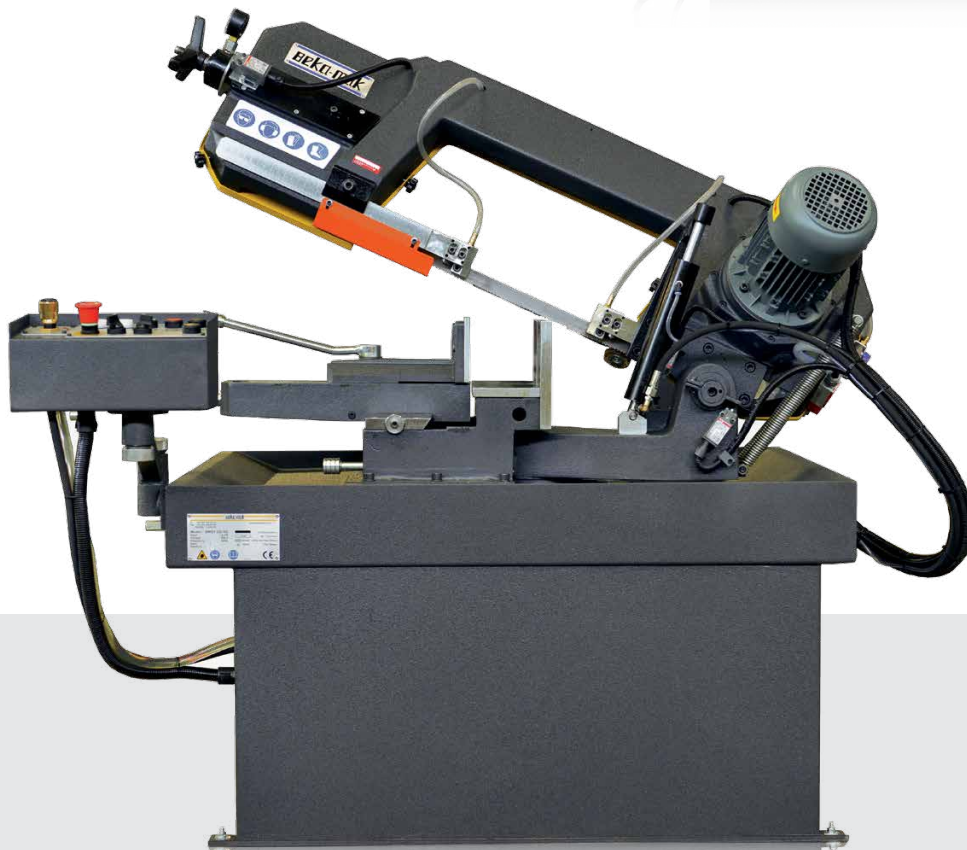

BMSY 230 DG

BMS 230 DG


Manual Double Mitre Cutting Pivot Type Bandsaw Machine

Standards

Blade 27
Height Adjustment Switch
Hydraumechanical Blade Tension
SAP Coolant Pump
Chip Brush
Length Stop
Security Switch
Control Panel
Moving Vice

Optionals

3 Mt Roller Table
Inverter
Microspray Coolant



Technical Datas

	BMSY 230 DGH				BMSY 230 DG				BMS 230 DG			
												
Cutting Capacity	0°	230	320 x 130	230	0°	230	320 x 130	230	0°	230	320 x 130	230
	-45°	180	230 x 160	150	-45°	180	230 x 100	150	-45°	180	230 x 100	150
	45°	210	230 x 160	180	45°	210	230 x 160	180	45°	120	230 x 160	180
	60°	120	120 x 100	100	60°	120	120 x 100	100	60°	120	120 x 100	100
Main Motor	1,0 - 1,3 kW				1,0 - 1,3 kW				1,0 - 1,3 kW			
Hydraulic Motor	0,37 kW				0,37 kW				-			
Coolant Motor	0,12 kW				0,12 kW				0,12 kW			
Cutting Speeds	35 - 70 m/min				35 - 70 m/min				35 - 70 m/min			
Blade Size	2730 x 27 x 0,9 mm				2730 x 27 x 0,9 mm				2730 x 27 x 0,9 mm			
Working Height	760 mm				760 mm				760 mm			
Dimensions	Lenght 1350 mm		Height 1300 mm		Lenght 1350 mm		Height 1300 mm		Lenght 1350 mm		Height 1300 mm	
	Width 700 mm		Weight 465 kg		Width 700 mm		Weight 430 kg		Width 700 mm		Weight 415 kg	

3 Mt Roller Table



Inverter



Microspray Coolant



FULLY AUTOMATIC PIVOT TYPE BANDSAW MACHINES

BMSO 440 - BMSO 320 L
BMSO 320 - BMSO 230



Type	Page
BMSO 440	100
BMSO 320 L	101
BMSO 320	102
BMSO 230	103

BMSO 440 - BMSO 320 L

Fully Automatic Pivot Type Bandsaw Machine


Standards

- Length Stop
- Vibration Cylinder
- Chip Brush
- SAP Coolant Pump
- Mechanical Top Clamping
- Security Switch
- Hydraulic Vice
- Sensitive Pressure

- Hydraumechanical Blade Tension
- Inverter
- Linear Way Arm Guide
- Blade 34
- 1,2 Mt Roller Table
- Control Panel
- Height Adjustment Switch

Optionals

- Hydraulic Blade Tension
- 3 Mt Roller Table
- Chip Conveyor
- Microspray Coolant
- Height Adjustment Sensor
- Sensitive Pressure
- Hydraulic Vice



Hydraulic Blade Tension



3 Mt Roller Table



Chip Conveyor



Microspray Coolant



Hydraulic Vice



Height Adjustment Sensor




OPTIONALS

Technical Datas

BMSO 440

BMSO 320 L

									
Cutting Capacity	0°	440	580 x 440	440		0°	330	500 x 320	330
Main Motor	3 kW					2,2 kW			
Hydraulic Motor	0,55 kW					0,37 kW			
Coolant Motor	0,12 kW					0,12 kW			
Feed Motor	0,55 kW					0,25 kW			
Chip Conveyor Motor	0,25 kW					-			
Cutting Speeds	20 - 100 m/min					20 - 100 m/min			
Blade Size	5200 x 34 x 1,1 mm					4160 x 34 x 1,1 mm			
Working Height	735 mm					640 mm			
Dimensions	Lenght 2630 mm		Height 1710 mm			Lenght 2100 mm		Height 1300 mm	
	Width 1110 mm		Weight 1140 kg			Width 850 mm		Weight 860 kg	



Sensitive Pressure



Microspray Coolant



Hydraulic Blade Tension



Chip Conveyor



3 Mt Roller Table



BMSO 320 - BMSO 230


Fully Automatic Pivot Type Bandsaw Machine

Standards

- Length Stop
- Hydraulic Vice
- Chip Brush
- Control Panel
- Inverter
- Blade 27
- 1,2 Mt Roller Table
- Mechanical Top Clamping
- Height Adjustment Switch
- Hydraumechanical Blade Tension
- SAP Coolant Pump
- Security Switch

Optionals

- Microspray Coolant
- Hydraulic Blade Tension
- Chip Conveyor
- 3 Mt Roller Table
- Inverter
- Sensitive Pressure



Sensitive Pressure



Microspray Coolant



Hydraulic Blade Tension



Chip Conveyor





3 Mt Roller Table



Technical Datas

	BMSO 320				BMSO 230			
								
Cutting Capacity	0°	320	320 x 300	300	0°	230	240 x 230	230
Main Motor	2,2 kW				1,0 - 1,3 kW			
Hydraulic Motor	0,37 kW				0,37 kW			
Feed Motor	0,25 kW				0,25 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				35 - 70 m/min			
Blade Size	3660 x 27 x 0,9 mm				2730 x 27 x 0,9 mm			
Working Height	640 mm				590 mm			
Dimensions	Lenght 1900 mm Width 850 mm		Height 1350 mm Weight 770 kg		Lenght 1700 mm Width 800 mm		Height 1160 mm Weight 530 kg	

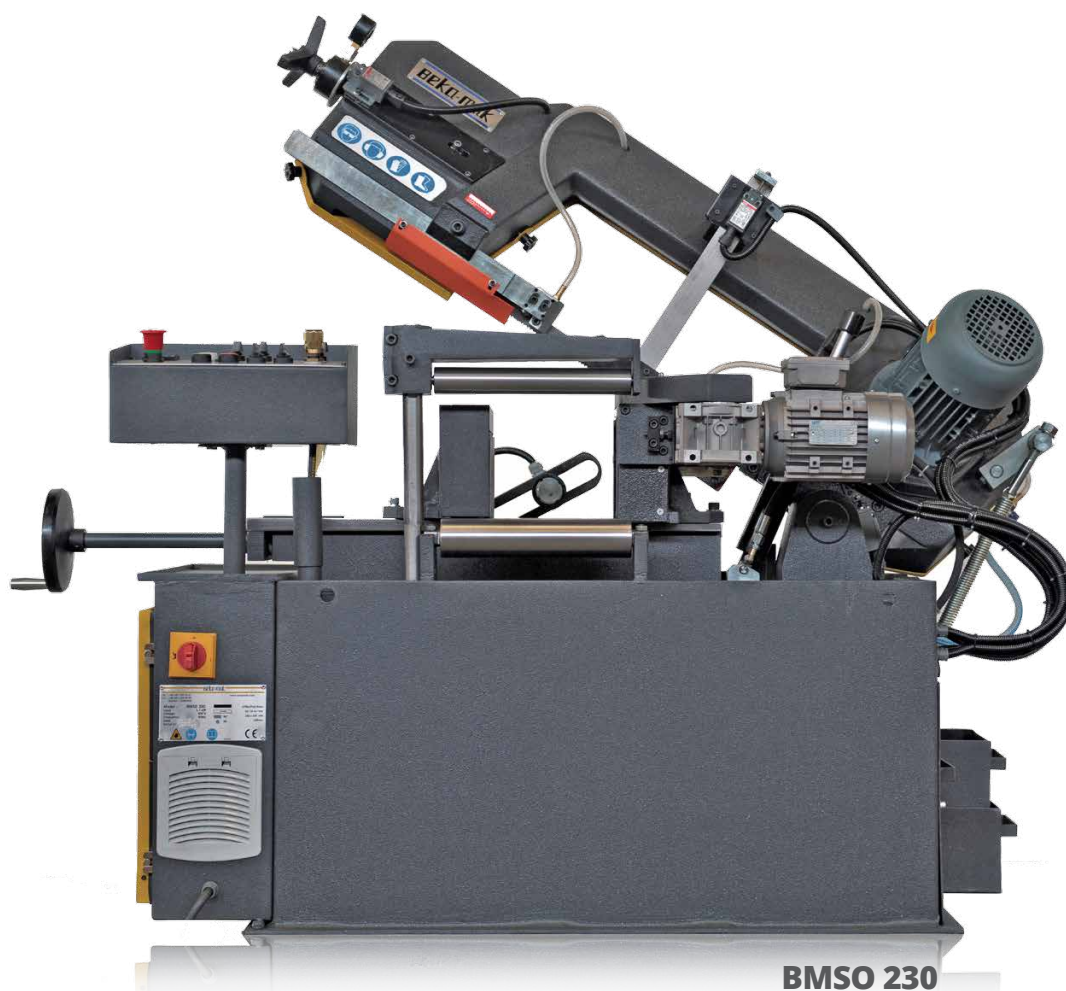

BMSO 230

Microspray Coolant



Inverter



3 Mt Roller Table



SEMI AUTOMATIC PIVOT TYPE BANDSAW MACHINES

BMSY 440 - BMSY 350 M
BMSY 320 L - BMSY 320
BMSY 280



Type	Page
BMSY 440	106
BMSY 350 M	108
BMSY 320 L	109
BMSY 320	110
BMSY 280	111

BMSY 440

Semi Automatic Pivot Type Bandsaw Machine

Standards

Inverter	Planetary Gearbox
Blade 34	Hydraulic Vice
Table	SAP Coolant Pump
Length Stop	Hydraumechanical Blade Tension
Security Switch	Control Panel
Vibration Cylinder	Height Adjustmen Switch
Linear Way Arm Guide	Chip Brush


Optionals

Hydraulic Blade Tension
3 Mt Roller Table
3 Mt Motorized Roller Table
Hydraulic Top Clamping
Chip Conveyor
Microspray Coolant
Turn Table



Technical Datas

				
Cutting Capacity	0°	440	610 x 440	440
	45°	410	410 x 440	410
Main Motor	3 kW			
Hydraulic Motor	0,55 kW			
Coolant Motor	0,12 kW			
Chip Conveyor	0,25 kW			
Bow Servo Motor	0,25 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	5200 x 34 x 1,1 mm			
Working Height	735 mm			
Dimensions	Lenght 2600 mm	Width 900 mm	Height 1710 mm	Weight 1310 kg



Hydraulic Blade Tension



3 Mt Roller Table



3 Mt Motorized Roller Table



Hydraulic Top Clamping



Chip Conveyor



Microspray Co-lolant



Turn Table



BMSY 350 M - BMSY 320 L

Semi Automatic Pivot Type Bandsaw Machine


Standards

Chip Brush
Control Panel
Hydraumechanical Blade Tension
Inverter
Height Adjustment Switch
Hydraulic Vice
Length Stop

SAP Coolant Pump
Security Switch

Optionals

Microspray Coolant
Hydraulic Blade Tension
Sensitive Pressure
Chip Conveyor
3 Mt Roller Table
Turn Table
Hydraulic Top Clamping



Microspray
Coolant



Hydraulic Blade
Tension




Sensitive Pressure



Chip Conveyor



3 Mt Roller Table



Turn Table



Hydraulic Top
Clamping




Technical Datas

BMSY 350 M

BMSY 320 L

									
Cutting Capacity	0°	350	570 x 260	350	0°	330	610 x 310	330	
	45°	350	460 x 180	350	45°	320	460 x 180	320	
Main Motor	2,2 kW				2,2 kW				
Hydraulic Motor	0,37 kW				0,37 kW				
Coolant Motor	0,12 kW				0,12 kW				
Cutting Speeds	20 - 100 m/min				20 - 100 m/min				
Blade Size	4160 x 34 x 1,1 mm				4160 x 34 x 1,1 mm				
Working Height	640 mm				640 mm				
Dimensions	Lenght 2300 mm		Height 1300 mm		Lenght 2100 mm		Height 1300 mm		
	Width 850 mm		Weight 795 kg		Width 850 mm		Weight 773 kg		



BMSY 320 - BMSY 280


Semi Automatic Pivot Type Bandsaw Machine

Standards

Chip Brush
Inverter
Security Switch
Control Panel
Height Adjustment Switch
Hydraumechanical Blade Tension
Blade 27
SAP Coolant Pump
Length Stop
Hydraulic Vice

Optionals

Hydraulic Top Clamping
Microspray Coolant
Sensitive Pressure
Chip Conveyor
3 Mt Roller Table
Turn Table
Hydraulic Blade Tension



Hydraulic Top
Clamping



Microspray
Coolant



Sensitive Pressure



Chip Conveyor



3 Mt Roller Table



Turn Table



Hydraulic Blade
Tension




Technical Datas

BMSY 320

				
Cutting Capacity	0°	320	440 x 220	320
	45°	280	280 x 200	260
Main Motor	1,5 kW			
Hydraulic Motor	0,37 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	3660 x 27 x 0,9 mm			
Working Height	640 mm			
Dimensions	Lenght 1900 mm		Height 1300 mm	
	Width 850 mm		Weight 670 kg	


BMSY 280

				
Cutting Capacity	0°	280	350 x 200	280
	45°	240	240 x 180	210
Main Motor	1,5 kW			
Hydraulic Motor	0,37 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	3400 x 27 x 0,9 mm			
Working Height	640 mm			
Dimensions	Lenght 1800 mm		Height 1300 mm	
	Width 850 mm		Weight 620 kg	



MANUAL PIVOT TYPE BANDSAW MACHINES

BMS 320 - BMS 280

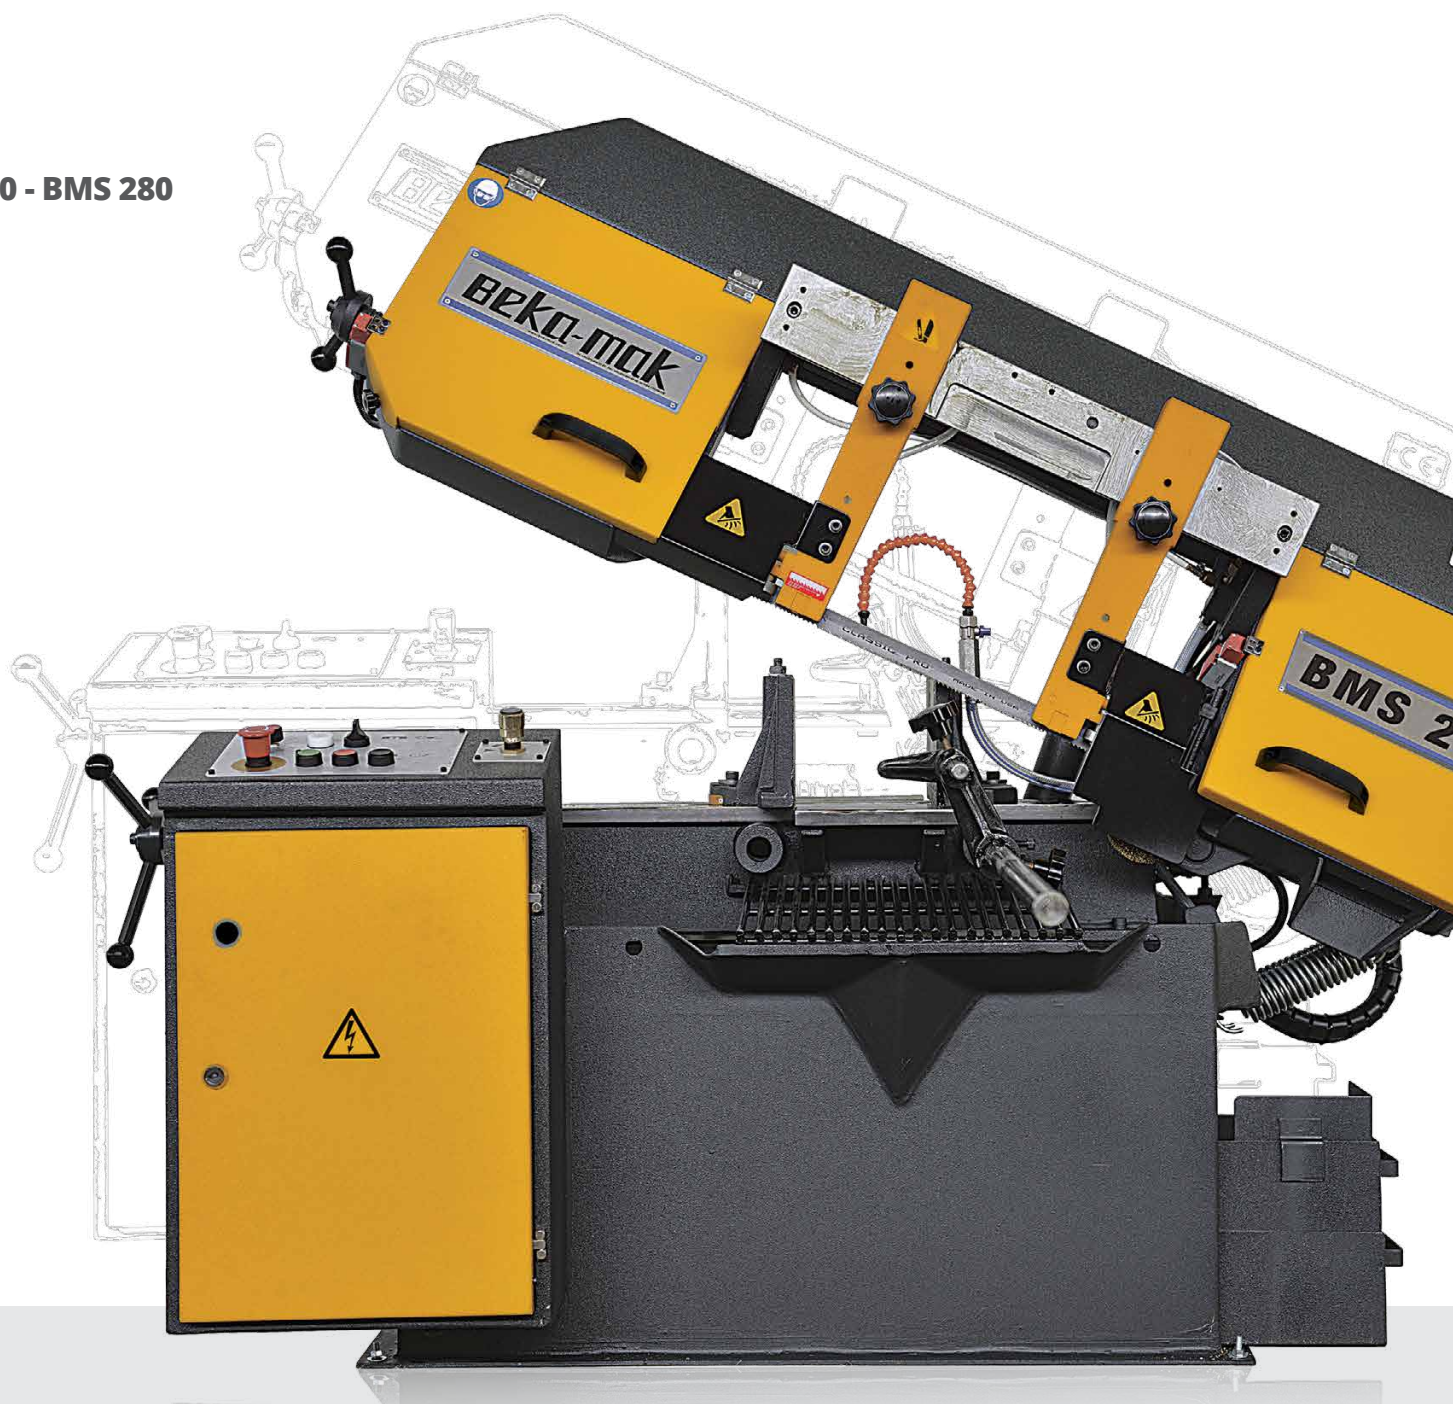

Type	Page
BMS 320	114
BMS 280	115

BMS 320 - BMS 280

Manual Pivot Type Bandsaw Machine

Standards

- Chip Brush
- Blade 27
- Control Panel
- Length Stop
- Security Switch
- Inverter
- Hydraumechanical Blade Tension
- SAP Coolant Pump

Optionals

- Microspray Coolant
- 3 Mt Roller Table
- Chip Conveyor
- Turn Table



Microspray Coolant



3 Mt Roller Table



Chip Conveyor




Turn Table



Technical Datas

	BMS 320				BMS 280			
								
Cutting Capacity	0°	320	440 x 220	320	0°	280	350 x 200	280
	45°	280	280 x 200	260	45°	240	240 x 180	210
Main Motor	1,5 kW				1,5 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	3660 x 27 x 0,9 mm				3400 x 27 x 0,9 mm			
Working Height	640 mm				640 mm			
Dimensions	Lenght 1900 mm		Height 1300 mm		Lenght 1800 mm		Height 1300 mm	
	Width 850 mm		Weight 625 kg		Width 850 mm		Weight 595 kg	



BMH 170

Hydraulic Hacksawing Machine

Standards

Vice
Length Stop
High Adjustment
Electrical Panel
Sensitive Pressure
Control Panel
Clinder
Coolant Pump
Roller Table
Saw Blade

Technical Datas


				
Cutting Capacity	0°	170	200 x 120	145
	45°	110	110 x 110	120
Main Motor	0,75 kW			
Cutting Speeds	120 m/min			
Blade Size	350 x 30 x 1,5 mm			
Working Height	430 mm			
Dimensions	Lenght 1100 mm Width 600 mm		Height 810 mm Weight 265 kg	



Roller Table




TUBES



WALL THICKNESS s(mm)	Outside Diameter D(mm) Toothing Z (tpi)									
	20	40	60	80	100	120	150	200	300	500
2	14	10/4	10/4	10/4	10/4	8/12	8/12	8/12	8/12	5/8
3	14	10/4	10/4	8/12	8/12	8/12	8/12	6/10	6/10	5/8
4	10/4	10/4	8/12	8/12	8/12	6/10	6/10	5/8	5/8	4/6S
5	10/4	10/4	8/12	8/12	6/10	6/10	5/8	4/6S	4/6S	4/6S
6	10/4	8/12	8/12	6/10	6/10	5/8	5/8	4/6S	4/6S	4/6S
8	10/4	8/12	8/12	6/10	5/8	5/8	4/6	4/6	4/6	4/6
10		8/12	6/10	5/8	4/6	4/6	4/6	4/6	4/6	4/5
12		8/12	6/10	4/6	4/6	4/6	4/6	4/6	4/6	4/5
15		8/12	6/10	4/6	4/6	4/6	4/6	4/5	4/5	4/5
20			4/6	4/6	4/6	4/6	4/6	4/5	4/5	3/4
30				4/6	4/6	4/5	4/5	4/5	4/5	2/3
50							4/5	3/4	2/3	2/3
80								3/4	2/3	2/3
>100									2/3	1,5/2

SOLID MATERIAL



Standart Toothing		Vario Toothing		Vario Toothing	
Cross Section	Toothing	Cross Section	Toothing	Cross Section	Toothing
bis 10 mm	14 tpi	bis 25 mm	10/14 tpi	50-120 mm	3/4 tpi
10-30 mm	10 tpi	15-40 mm	8/12 tpi	100-250 mm	2/3 tpi
30-50 mm	8 tpi	25-20 mm	6/10 tpi	150-400 mm	1.5/2 tpi
50-80 mm	6 tpi "	35-70 mm	5/8 tpi	350-600 mm	1.1/1.6 tpi
80-120 mm	4 tpi **	40-90 mm	5/6 tpi	>500 mm	0.75/1.25 tpi
120-200 mm	3 tpi **	50-120 mm	4/6 tpi***		
200-400 mm	2 tpi	80-180 mm	3/4 tpi***		
300-700 mm	1.25 tpi	130-135 mm	2/3 tpi		
>600 mm	0,75 tpi	150-450 mm	1.5/2 tpi		
		200-600 mm	1.1/1.6 tpi		
		>500 mm	0.75/1.25 tpi		

Hydraulic Top Clamping For
BMSY 1110 C



Hydraulic Top Clamping For
NC Machines



Laser Line Pointer



Microspray



Multiple Segments



Multiple Segments



Hydraulic Top Clamping



Hydraulic Blade Tension



Chip Conveyor For
BMSY 1110 C



Chip Conveyor For
BMSY 650 DG



Second Vice For BMSY 1110 C



Chip Conveyor For
BMSO 360 CH



Slide Connection Roller Tables For BMSY 650 DG



3MT MOTORIZED ROLLER TABLE FOR BMSY 440DGH



3MT MOTORIZED ROLLER TABLE FOR BMSY 820C



3 MT ROLLER TABLE FOR BMSY 810C





Blank lined area for notes or calculations.

Blank lined area for drawing or writing.



www.bekamak.com

ente

BEKA - MAK MAKİNE SANAYİ VE TİCARET A.Ş.

Başköy İzmir Yolu Cad. No: 698 16370 Nilüfer / BURSA

Tel : +90 (224) 449 03 61

Fax : +90 (224) 449 03 60

E-mail : info@bekamak.com



MEMBER OF



Türkiye Makina
(Malatçılar Birliği)
www.mib.org.tr



European Committee for
Cooperation of the Machine Tool Industries
www.cecimo.be



YOUR BEKA - MAK PARTNER

